

NIME



Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Designed by Dean Skira, better not underestimate Nime, as the aperture of only 3/8" is only the façade that hides away a host of possibilities to control your beam.

Within the same opening and thanks to an ingenious set of custom optics, Nime allows you to focus the beam from 20° up to 50° and offers rotation up to 355° and tilting up to 30°, without changing its looks. Nime II offers two fixed beam options within numerous smaller enclosure options.

Specification	Trimless (FC)	Trimless (MD/WS)	ST (MD/WS)
LED Aperture:	3/8"		
Ceiling Cut-out:	5"		2"-5/8"
Ceiling Thickness:	Max. 5/8"		
Adjustability:	Adjustable 0-30° / 355°		
Rating:	Damp		

Performance	
LED Maintenance:	L90>72,600h
McAdam Step:	2
CRI:	90
*SP:	12W
*MP:	6.2W
*HP:	9W

Delivered Lumens:	2700K			3000K			3500K		
FC Adjustment:	Min	Half	Max	Min	Half	Max	Min	Half	Max
FC:	269Lm	342Lm	382Lm	269Lm	342Lm	382Lm	269Lm	342Lm	382Lm
Optic:	MD		WS	MD		WS	MD		WS
SP:	239Lm		250Lm	239Lm		250Lm	239Lm		250Lm
MP:	322Lm		337Lm	322Lm		337Lm	322Lm		337Lm
HP:	420Lm		437Lm	420Lm		437Lm	420Lm		437Lm

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: NIMR-SPFC27A-PR-TLNATD1-120

Luminaire	Shape	Power*	Optic	CCT	Function	Finish	Installation	Application	Controls***
NIM NIME	R Round	SP Standard Power	FC 20-50° Field adjusted	27 2700K 30 3000K 35 3500K	A Adjustable (OK)	PR Primer-Field Paintable	TL Recessed with mud-in trimless kit	NAT New Construction Non-IC Airtight	D1-120 0-10V dim 120V D1-277 0-10V dim 277V
		SP Standard Power	MD Medium Spot 35° (NIME II)	27 2700K 30 3000K 35 3500K	A Adjustable (OK)	PR Primer-Field Paintable	TL Recessed with mud-in trimless kit	ICAT ⁽¹⁾ New Construction IC Airtight	D1-120 0-10V dim 120V D1-277 0-10V dim 277V
		MP Medium Power	WS Wide Spot 52° (NIME II)	35 3500K		B Black	ST Small Trim	INAT ⁽¹⁾ New Construction IC Non-Airtight	D1-347 ⁽²⁾ 0-10V dim 347V
		HP High Power				W White		NPF New Construction Non-IC Plasterframe	D5 - 120V ⁽³⁾ Dali dim 120V
								RMT Remote Power Supply	D5 - 277V ⁽³⁾ Dali dim 277V
									D8 - 120V FE ELV dim 120V

1 Available for Medium Power only.

2. Only Available with Application RMT.

3. Not Available in Power HP.

*** Contact factory for Dali, DMX, or other dimming options.




Related Products


Microspy In Trimless, Microspy In, Microspy In OK, Microgrid, Microspy C (pendant)

Finish Options


NIME TRIMLESS (FC)

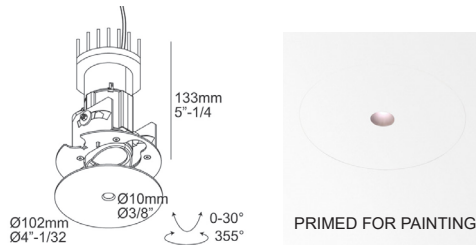

NIME II TRIMLESS ADJUSTABLE (MD/WS)

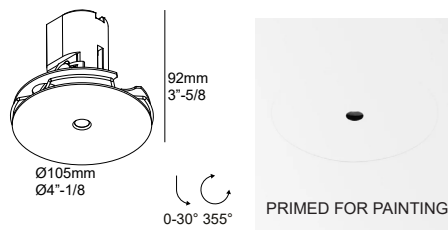


NIME II SMALL TRIM (MD/WS)

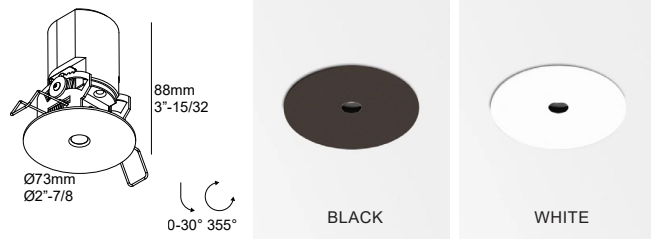

Photometric Data

NIME

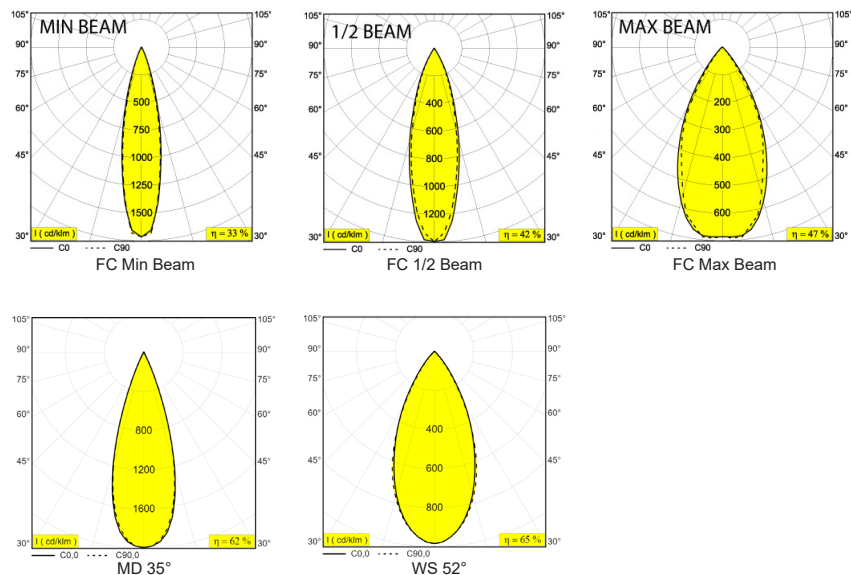




Installation Options

NON-IC AIRTIGHT (For Optic FC)

L-Large:

A:18"-7/8 x **B:**12"-7/16 x **C:**8"-1/2
A:479mm x **B:**316mm x **C:**220mm




- Large Profile 8"-1/2 Height
- New Construction Airtight
- For use in insulated ceiling
- Chicago Plenum
- ETL Listed
- Hangerbar expand to 26"- reduce to 14"-3/16
- Damp rated
- Voltage dedicated (120V or 277V)

IC AIRTIGHT (For Optic MD/WS)

S-SMALL:

A:12"-5/8 x **B:**11"-1/16 x **C:**4"-13/16
A:323mm x **B:**281mm x **C:**122mm




- Low Profile under 5" Height
- New Construction Airtight
- For use in insulated ceiling
- Chicago Plenum
- ETL Listed
- Hangerbar expand to 24"-23/32 or 15"-3/32 - reduce to 12"-23/32 or 9"-1/32
- Damp rated
- Patented System for easy driver servicing from room side

IC NON-AIRTIGHT (For Optic MD/WS)

S-SMALL:

A:12"-5/8 x **B:**11"-1/16 x **C:**4"-13/16
A:323mm x **B:**281mm x **C:**122mm




- Low Profile 5" Height
- New Construction Non-Airtight
- For use in insulated ceiling
- ETL Listed
- Hangerbar expand to 26"- reduce to 14"-3/16
- Damp rated

NON-IC PLASTERFRAME (For Optic MD/WS)

S-SMALL:


A:12"-23/32 x **B:**11"-1/16 x **C:**5"
A:323mm x **B:**281mm x **C:**127mm



- Low Profile 5" Height
- New Construction
- For use in non-insulated ceiling
- ETL Listed
- Hangerbar expand to 24"-23/32 or 15"-3/32 - reduce to 12"-23/32 or 9"-1/32
- Damp rated
- Voltage dedicated (120V or 277V)

Remote Driver (With Controls D8 or D5)


A: 8" x **B:** 2"-1/2 x **C:** 2"-1/2
A: 203mm x **B:** 64mm x **C:** 64mm



- For Remote application
- ETL Listed
- Damp rated

Remote Driver (With Controls D1)

A: 8" x **B:** 2"-3/16 x **C:** 4"-1/4
A: 203mm x **B:** 72mm x **C:** 108mm



- For Remote application
- ETL Listed
- Damp rated



Driver Options

D1

- Dimming Control 0-10V
- Dimming Range 1-100%
- Dim to off yes at 0.8V, 1V, 1.2V, or N/A
- Power Factor @ Full Load >0.9 under 120Vac Input with 80~100% load condition (for all output currents)
- Efficiency @ Full Load ≥86
- THD @ Full Load <20% under 120Vac input with 80~100% load condition (for all output currents)

Dimmer Compatibility

- Leviton IP710-LFZ / IP710-DLX
- Lutron DTV/DVSTV/DVSCTV/DVSCSTV

D5

- Dimming Control Dali
- Dimming Range 1-100%
- Dim to off yes
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥85
- THD @ Full Load <20%

D8

- Dimming Control Phase Control
- Dimming Range 10-100%
- Dim to off no
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥78
- THD @ Full Load <12%

Dimmer Compatibility

- Leviton IPE04-1LZ
- Lutron DVELV-300P

D8 (With Application RMT - 2 fixtures)

- Dimming Control Phase Control
- Dimming Range 20-100%
- Dim to off yes
- Power Factor @ Full Load >0.95
- Efficiency @ Full Load ≥80
- THD @ Full Load <10%

Dimmer Compatibility

- Leviton IPE04-1LZ
- Lutron DVELV-300P

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.