




## OML50 - INFORM DU HO 984mm 24LED 94063 DIM5

PRODUCTREFERENTIE 31433 9435 B

BESCHIKBAAR IN  
ZWART 31433 9435 B

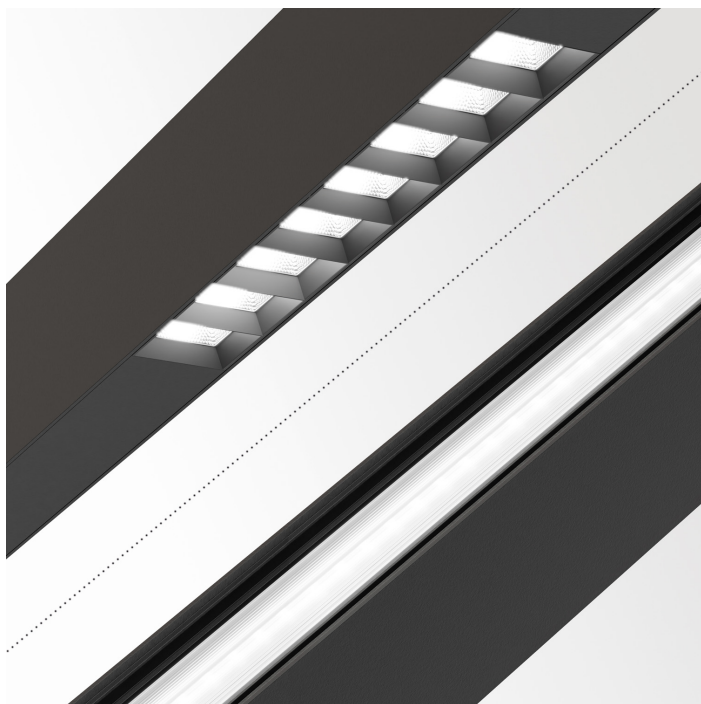

[Bekijk op website](#)



### Algemene info

|                        |                                                                                                                            |
|------------------------|----------------------------------------------------------------------------------------------------------------------------|
| LOCATIE                | binnen                                                                                                                     |
| STOF EN WATERDICHTHEID | IP20                                                                                                                       |
| GEWICHT (KG)           | 1.5                                                                                                                        |
| INFO                   | CLUSTER DOWN: 5552lm/m<br>CLUSTER UP: 2776lm/m<br>INCL.DIMMABLE LED POWER SUPPLY<br>(DALI-2 standard)<br>CABLING 1 CIRCUIT |

### Elektrische info

|                 |                      |
|-----------------|----------------------|
| INGANGSSPANNING | 220-240V / 0 50-60Hz |
| KLASSE          | I                    |
| VOEDING         | YES                  |
| DIM TYPE        | DALI                 |
| ENERGIE KLASSE  | D                    |
| CERTIFICATEN    | EPD, RCM             |

### Info lichtbron

|                          |                                                                                                                        |
|--------------------------|------------------------------------------------------------------------------------------------------------------------|
| LIGHTSOURCE NAME         | LED                                                                                                                    |
| LICHTBRON                | DOWN: LED cluster 36,3W / CRI>90 (R9: 50) / 4000K / 5462lm<br>UP: LED cluster 18,1W / CRI>90 (R9: 50) / 4000K / 2731lm |
| TM-30-15 WAARDEN         | Rf: 90 / Rg: 101                                                                                                       |
| SDCM                     | SDCM3                                                                                                                  |
| RISK-GROEP               | RG1                                                                                                                    |
| LM80                     | L80 > 60000                                                                                                            |
| BEAMANGLE                | 63°                                                                                                                    |
| LED TECHNIEK (LICHTBRON) | DOWN: 5462lm // 36,3W // 151lm/W<br>UP: 2731lm // 18,1W // 151lm/W                                                     |

### Opties

WIRELESS CONTROL DIM5

Notes: