




## OML50 - INFORM DU HO 984mm 24LED 94063 DIM5

**REFERENCE** 31433 9435 B

AVAILABLE IN  
**BLACK** 31433 9435 B

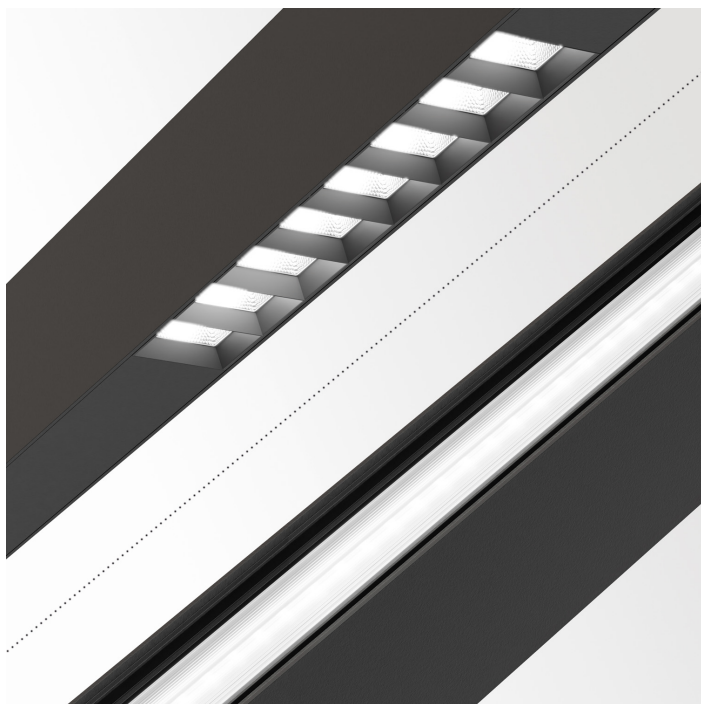

[View on website](#)



### General info

|                           |                                                                                                                            |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <b>LOCATION</b>           | indoor                                                                                                                     |
| <b>INGRESS PROTECTION</b> | IP20                                                                                                                       |
| <b>WEIGHT (KG)</b>        | 1.5                                                                                                                        |
| <b>INFORMATION</b>        | CLUSTER DOWN: 5552lm/m<br>CLUSTER UP: 2776lm/m<br>INCL.DIMMABLE LED POWER SUPPLY<br>(DALI-2 standard)<br>CABLING 1 CIRCUIT |

### Electrical info

|                     |                      |
|---------------------|----------------------|
| <b>ELECTRICAL</b>   | 220-240V / 0 50-60Hz |
| <b>CLASS</b>        | I                    |
| <b>POWER SUPPLY</b> | YES                  |
| <b>DIM TYPE</b>     | DALI                 |
| <b>ENERGY CLASS</b> | D                    |
| <b>CERTIFICATES</b> | EPD, RCM             |

### Lightsource info

|                                    |                                                                                                                        |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| <b>LIGHTSOURCE NAME</b>            | LED                                                                                                                    |
| <b>LIGHTSOURCE</b>                 | DOWN: LED cluster 36,3W / CRI>90 (R9: 50) / 4000K / 5462lm<br>UP: LED cluster 18,1W / CRI>90 (R9: 50) / 4000K / 2731lm |
| <b>TM-30 VALUES</b>                | Rf: 90 / Rg: 101                                                                                                       |
| <b>SDCM</b>                        | SDCM3                                                                                                                  |
| <b>RISKGROUP</b>                   | RG1                                                                                                                    |
| <b>LM80</b>                        | L80 > 60000                                                                                                            |
| <b>BEAMANGLE</b>                   | 63°                                                                                                                    |
| <b>LED TECHNICS (LIGHT SOURCE)</b> | DOWN: 5462lm // 36,3W // 151lm/W<br>UP: 2731lm // 18,1W // 151lm/W                                                     |

### Options

WIRELESS CONTROL DIM5

Notes: