




OBIN ON 2 93024 DIM8

30512 9328 W

AVAILABLE IN  
**BLACK** 30512 9328 B  
**WHITE** 30512 9328 W

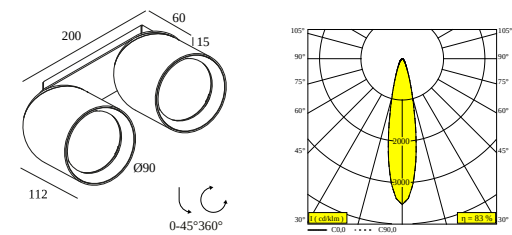

 [View on website](#)



| General info       |                                               |
|--------------------|-----------------------------------------------|
| LOCATION           | indoor                                        |
| INSTALLATION       | Ceiling Surface mounted                       |
| INGRESS PROTECTION | IP20                                          |
| WEIGHT (KG)        | 1.4                                           |
| ADJUSTABILITY      | 0° to 45° swiveling, 360° rotatable           |
| INFORMATION        | 2 x LENS FL-24°<br>INCL.DIMMABLE POWER SUPPLY |

| Electrical info |                       |
|-----------------|-----------------------|
| ELECTRICAL      | 220-240V / 50-60Hz    |
| CLASS           | I                     |
| POWER SUPPLY    | YES                   |
| DIM TYPE        | mains (phase cut-off) |
| ENERGY CLASS    | E                     |
| CERTIFICATES    | CB, ENEC, RCM         |

| Lightsource info            |                                                          |
|-----------------------------|----------------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                                      |
| LIGHTSOURCE                 | 2 x (LED array 11,6W / CRI>90 (R9: 52) / 3000K / 1524lm) |
| TM-30 VALUES                | rf: 90 / Rg: 99                                          |
| SDCM                        | SDCM1                                                    |
| RISKGROUP                   | RG1                                                      |
| LM80                        | L90B10 > 50000                                           |
| BEAMANGLE                   | 24°                                                      |
| LED TECHNICS (LIGHT SOURCE) | 3048lm // 23,2W // 131lm/W                               |
| LED TECHNICS (LUMINAIRE)    | 2544lm // 26,7W // 95lm/W                                |


| Requirements |  |
|--------------|--|
| SPY 90 TUBE  |  |

| Accessories  |  |
|--------------|--|
| HONEYCOMB 75 |  |

For detailed installation instructions, please consult the manual : [30512\\_XXX8\\_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices



**19810 0110 B** HONEYCOMB 75 SINGLE USE B

☐

Finish your product



**19810 0170 B** SPY 90 TUBE B

☐

**19810 0170 CR** SPY 90 TUBE CR

☐

**19810 0170 DC** SPY 90 TUBE DC

☐

**19810 0170 FBR** SPY 90 TUBE FBR

☐

**19810 0170 FG** SPY 90 TUBE FG

☐

**19810 0170 GC** SPY 90 TUBE GC

☐

**19810 0170 PB** SPY 90 TUBE PB

☐

**19810 0170 W** SPY 90 TUBE W

☐

Notes: