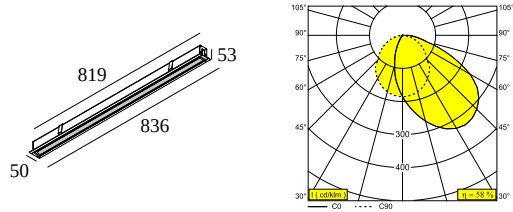




DOT.COM L WALLWASH 08 ST 927
HO

11523 9200 W-B

AVAILABLE IN
WHITE-BLACK 11523 9200 W-B



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - 824 x 40
RECESSED DEPTH (MM)	50
THICKNESS OF MOUNTING SURFACE (MM)	min.10
INGRESS PROTECTION	IP20
WEIGHT (KG)	1.8
ADJUSTABILITY	non adjustable
INFORMATION	EXCL.LED POWER SUPPLY 500mA-DC
Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, LCA
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED flex 18W / CRI>90 (R9: 60) / 2700K / 2240lm
SDCM	SDCM3
LM80	L70 > 30000
LED TECHNICS (LIGHT SOURCE)	2240lm // 18W // 124lm/W
LED TECHNICS (LUMINAIRE)	1298lm // 20,7W // 63lm/W
Requirements	
LED POWER SUPPLY 500mA-DC DIM	


For detailed installation instructions, please consult the manual : [11523_9200_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Concrete	-
 Concrete + plaster	-
 Lintel + plaster	-
 Hollow-core slab	-
 Hollow-core slab + plaster	-
 Stretched ceiling	-

FINISH YOUR SPECIFICATION

Emergency units

	21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B	☐
	Cutout dimension (mm): 27	
	21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W	☐

DOT.COM L WALLWASH 08 ST 927 HO

11523 9200 W-B


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1

1

Dimtype: 1-10V

Cutout dimension (mm): 30




300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1

Dimtype: DALI

Cutout dimension (mm): 45




300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL

1

Dimtype: non-dimmable

Cutout dimension (mm): 30




300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL

1

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45




300 90 61 LED POWER SUPPLY MULTI-POWER DIM6

1

Dimtype: mains (phase cut-off) or push button

Cutout dimension (mm): 56




300 90 63 LED POWER SUPPLY MULTI-POWER DIM9

2(1)

Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 82




300 90 64 LED POWER SUPPLY MULTI-POWER DIM7

1(0)

Dimtype: 1-10V or push button

Cutout dimension (mm): 72



300 90 68 LED POWER SUPPLY MULTI-POWER DIM5











1(0)

Dimtype: DALI

Cutout dimension (mm): 72



DOT.COM L WALLWASH 08 ST 927 HO

11523 9200 W-B

	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	3(2)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	1(0)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	1(0)	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	2	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	1	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	1	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	1	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	2(1)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	1	☐

DOT.COM L WALLWASH 08 ST 927 HO

11523 9200 W-B

	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	1	☐
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 Dimtype: DALI Cutout dimension (mm): 30	1	☐

Notes: