




EXCLUSIVELY AVAILABLE IN INDIA

COMPO M WALLWASH TW 940

9 15734 9000 C

AVAILABLE IN
CHROMED 9 15734 9000 C
WHITE 9 15734 9000 W

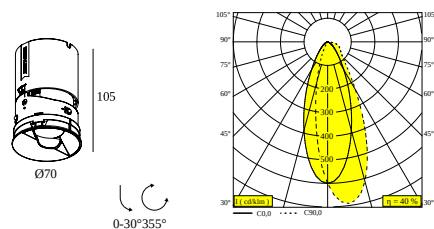

[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 110
RECESSED DEPTH (MM)	105
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.266
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 11,8W / CRI>90 (R9: 50) / 1800K-4000K / 1199lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	NA
LED TECHNICS (LIGHT SOURCE)	1199lm // 11,8W // 102lm/W
LED TECHNICS (LUMINAIRE)	470lm // 13,6W // 35lm/W

Requirements

LED POWER SUPPLY 500 mA - DC

For detailed installation instructions, please consult the manual : [9_15734_XXX0_HAND.pdf](#)

COMPO M WALLWASH TW 940

9 15734 9000 C

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required

FINISH YOUR SPECIFICATION

LED Power supply	# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.	Min current Max current

15710 5900 LED POWER SUPPLY MULTIPOWER 12W DALI DT8 500mA

1

Mounting kits		
	15710 0020 B MOUNTING KIT COMPO M TRIM B	☐
	Cutout dimension (mm): 76	
	15710 0020 W MOUNTING KIT COMPO M TRIM W	☐
	15710 0050 MOUNTING KIT COMPO M TRIMLESS	☐
	Cutout dimension (mm): 76	

Notes: