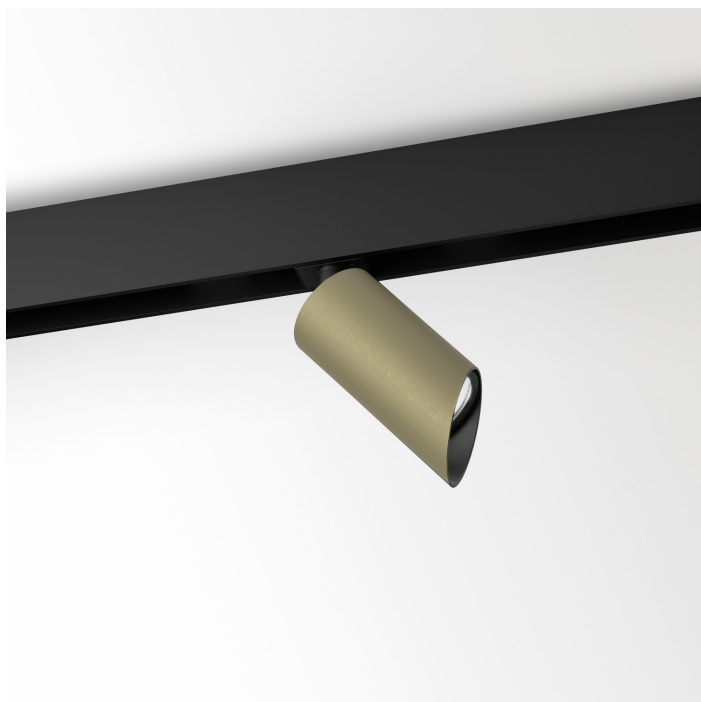




M20/M26H - SPY 52 WALLWASH 930 DIM5

19890 9305 GC

AVAILABLE IN



BLACK 19890 9305 B

FLEMISH BRONZE 19890 9305 FBR

FLEMISH GOLD 19890 9305 FG

GOLD COLOURED 19890 9305 GC

WHITE 19890 9305 W



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	WALLWASH LENS EXCLLED POWER SUPPLY 48V-DC

Electrical info

ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 52) / 3000K / 1089lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1089lm // 8,6W // 127lm/W
LED TECHNICS (LUMINAIRE)	514lm // 9,9W // 52lm/W

Remarks

Take a look at our **MAGNETIC PROFILES** movie

Requirements

LED POWER SUPPLY 48V-DC

For detailed installation instructions, please consult the manual : **19890_XXX5_HAND.pdf**

M20/M26H - SPY 52 WALLWASH 930 DIM5

19890 9305 GC

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

10


Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

24

Dimtype: non-dimmable




21012 0230 LED POWER SUPPLY 48V-DC / 100W

10

Dimtype: non-dimmable

Cutout dimension (mm): 40



21012 0240 LED POWER SUPPLY 48V-DC / 200W

20

Dimtype: non-dimmable

Cutout dimension (mm): 40

COMPATIBLE COMPOSABLES

SHIFTLINE M26H + SBL

Available Colours



30411 9205 SHIFTLINE M26H + SBL 2m DIM5



30411 9305 SHIFTLINE M26H + SBL 2m DIM5






30412 9205 SHIFTLINE M26H + SBL 3m DIM5







DELTALIGHT

M20/M26H - SPY 52 WALLWASH 930 DIM5

19890 9305 GC

	30412 9305 SHIFTLINE M26H + SBL 3m DIM5	 
	30413 9205 SHIFTLINE M26H + SBL 4m DIM5	 
	30413 9305 SHIFTLINE M26H + SBL 4m DIM5	 

SHIFTLINE M26H profile	Available Colours
 23359 0000 SLM26H - PROFILE	 
 23359 0010 SLM26H - PROFILE 1m	 
 23359 0020 SLM26H - PROFILE 2m	           
 23359 0030 SLM26H - PROFILE 3m	           

SPLITLINE M20 ST profile	Available Colours
 23397 0000 SPM20 ST - PROFILE	 
 23397 0020 SPM20 ST - PROFILE 2m	 

DELTA LIGHT





M20/M26H - SPY 52 WALLWASH 930 DIM5

19890 9305 GC



23397 0030

SPM20 ST - PROFILE 3m

SPLITLINE M20 profile		Available Colours
	420 20 10 00 SPM20 - PROFILE 1m	
	420 20 20 00 SPM20 - PROFILE 2m	
	420 20 30 00 SPM20 - PROFILE 3m	
	23301 0000 SPM20 - PROFILE B	

Notes: