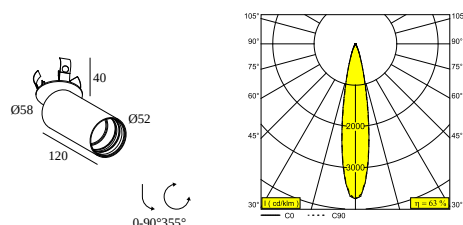




SPY 52 CLIP 92720

REFERENCE 19820 9220 FW

AVAILABLE IN
BLACK-BLACK 19820 9220 B-B
FLEMISH BRONZE-BLACK 19820 9220 FBR-B
FLEMISH GOLD-BLACK 19820 9220 FG-B
FULL WHITE 19820 9220 FW
GOLD COLORED-BLACK 19820 9220 GC-B
WHITE-WHITE 19820 9220 W-W



 [View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Semi-recessed
CUTOUT SHAPE/SIZE (MM)	round - 51
RECESSED DEPTH (MM)	40
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-20° EXCLLED POWER SUPPLY 350-700mA-DC Optional REFLECTORS 30° & 45° available

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, LCA

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8-12,4W / CRI>90 (R9: 60) / 2700K / 753-1403lm
TM-30 VALUES	Rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	1403lm // 12,4W // 113lm/W
LED TECHNICS (LUMINAIRE)	879lm // 14,3W // 62lm/W

Requirements

SPY 52 TUBE
 LED POWER SUPPLY 350 / 500 / 700mA-DC DIM

Options

MOUNTING KIT FLUSH SPY

Accessories

HONEYCOMB 42
 SPREAD LENS 42
 LINEAR SPREAD LENS 42

DELTALIGHT

SPY 52 CLIP 92720

19820 9220 FW

SOFTENING LENS 42
GLASS SBL 42

For detailed installation instructions, please consult the manual : [19820_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Plasterboard	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Stucanet	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Wood	-
 Concrete	-
 Concrete + plaster	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Lintel + plaster	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Hollow-core slab	-
 Hollow-core slab + plaster	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Stretched ceiling	-

FINISH YOUR SPECIFICATION

LED power supplies

of Fixtures













of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current

DELTALIGHT

SPY 52 CLIP 92720











19820 9220 FW

	300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1	2	☐
	Dimtype: 1-10V		
	Cutout dimension (mm): 30		
	300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	2	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL	2	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL	2	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1	2	☐
	Dimtype: 1-10V		
	Cutout dimension (mm): 30		
	300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	2	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL	2	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL	2	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 48 700 ED1 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1	2	☐
	Dimtype: 1-10V		
	Cutout dimension (mm): 30		
	300 48 700 ED5 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	2	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		

DELTALIGHT











SPY 52 CLIP 92720

19820 9220 FW

	300 48 700 MDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL Dimtype: non-dimmable Cutout dimension (mm): 30	2	☐
	300 48 700 WDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 45	2	☐
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: mains (phase cut-off) or push button Cutout dimension (mm): 56	2 2 2	☐
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 82	4(4) 4(4) 4(3)	☐
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 72	2(2) 2(1) 2(1)	☐
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1-10V or DALI or push button	2 - 2	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	2(2) 2(1) 2(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	2->6(6) 6(4) 4(3)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	3(2) 2(1) 1(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	2(2) 2(1) 1(1)	☐

SPY 52 CLIP 92720










19820 9220 FW

	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	3->4 2->4 2->4	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	2 2 2	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	3 3 2	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	3 3 3	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	4(4) 3(3) 3(3)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	3 3 2	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	2->2 0 0	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	1 1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	2->3 2->2	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	2 2 1	☐

DELTALIGHT

SPY 52 CLIP 92720

19820 9220 FW


	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 40	1	☐
	21012 0318 LED POWER SUPPLY 500mA / 10W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 40	1	☐
	21012 0328 LED POWER SUPPLY 700mA / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 40	1	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68 Dimtype: non-dimmable Cutout dimension (mm): 60	2(2)	☐
	21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68 Dimtype: non-dimmable Cutout dimension (mm): 60	2(1)	☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68 Dimtype: non-dimmable Cutout dimension (mm): 60	2(1)	☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 Dimtype: DALI Cutout dimension (mm): 30	2	☐
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 Dimtype: DALI Cutout dimension (mm): 30	2	☐
	21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5 Dimtype: DALI Cutout dimension (mm): 30	2	☐

DELTALIGHT

SPY 52 CLIP 92720

19820 9220 FW

Mounting kits




414 90 01 MOUNTING KIT FLUSH SPY

Cutout dimension (mm): 83


☐

Light altering devices




19810 0010 B HONEYCOMB 42 SINGLE USE B

☐




19810 0020 LINEAR SPREAD LENS 42

☐




19810 0030 SPREAD LENS 42

☐




19810 0040 SOFTENING LENS 42

☐



19810 0050 GLASS SBL 42


☐



19810 0060 B HONEYCOMB 42 DOUBLE USE B

☐

Finish your product



19810 0100 B SPY 52 TUBE B

☐




DELTALIGHT

SPY 52 CLIP 92720

19820 9220 FW

19810 0100 FBR	SPY 52 TUBE FBR	☐
19810 0100 FG	SPY 52 TUBE FG	☐
19810 0100 GC	SPY 52 TUBE GC	☐
19810 0100 W	SPY 52 TUBE W	☐

Replaceable reflector / lens

	19810 0180	SPY 52 REFLECTOR 20°	☐
	19810 0190	SPY 52 REFLECTOR 45°	☐
	19810 0240	SPY 52 REFLECTOR 30°	☐

Notes: