

MILES



A collection of 4 purely handcrafted glass shapes, each in 4 different colours (pink, amber, smoke or mist), each recognizable yet unique in all respects. A family of suspensions that play on the visual contrast between the coloured and white blown glass, combined with different shapes and colours, also ideal for multiple compositions. All shapes and finishes are inspired by the interplay of opacity, translucency and transparency. Its translucent or milky forms and dynamic light offer a countless number of scenarios. When switched off its transparency makes MILES almost disappear. When switched on they provide a cozy and stylish luminous presence, stimulating senses and perceptions.

Specification	
Aperture:	1 ⁵ / ₈ "
Installation Method:	4" J-Box
Adjustability:	Fixed
Rating:	IP20

Performance	
LED Maintenance:	L90>50,000h
McAdam Step:	2
CRI:	90
*Miles SP:	7.1W
*Miles E:	20W max - E26 Medium Base 120V

Delivered Lumens		2700K			
Optic:	50°				
Color:	Amber	Mist	Pink	Smoke	
Miles C1:	584Lm	580Lm	585Lm	542Lm	
Miles C2:	589Lm	588Lm	591Lm	590Lm	
Miles C3:	575Lm	584Lm	560Lm	419Lm	
Miles C4:	577Lm	459Lm	533Lm	186Lm	

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: MLS-ENANA-PCNA-INCNA-120-C4P-B

Luminaire	Power	Optic	CCT (with LED)	Style	Installation	Application	Controls***	Glass Style	Glass Color	Finish
MLS MILES	SP Standard Power	50 50°	27 2700K	PC Pendant, cord suspended	PRB Coverplate Black	RMT Remote Power Supply	D1-UNV 0-10V dim 120-277V	C1 Wide cone glass	A Amber	B Black
					PRW Coverplate White		D8-120 FE ELV dim 120V	C2 Flat dome glass	M Mist	
	NA Power Box includes black coverplate for 4" junction box				PBB Power Box Black	D8-120 FE ELV dim 120V	C3 Small extended cone glass	P Pink		
E E26	NA Lamp not included	NA Lamp not included	PC Pendant, cord suspended	NA Includes black coverplate for 4" junction box	INC Line Voltage	NA-120 Lamp not included 120V	C4 Wine bottle shaped glass	S Smoke		

*** Contact factory for additional dimming options


Related Products

Soiree, Gibbo, Spy C, Hedra C





Finish Options


MILES C1

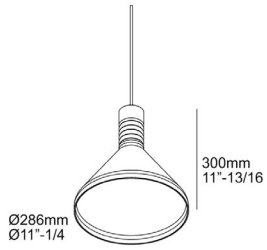


MILES C2

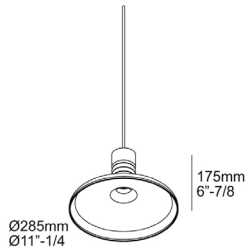

MILES C3

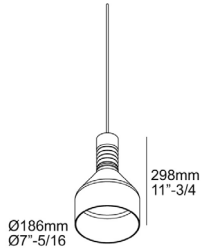

MILES C4



Accessories



MILES TUBE
23944 0010 B




MILES TUBE
23944 0010 M




Photometric Data


MILES C1 LED

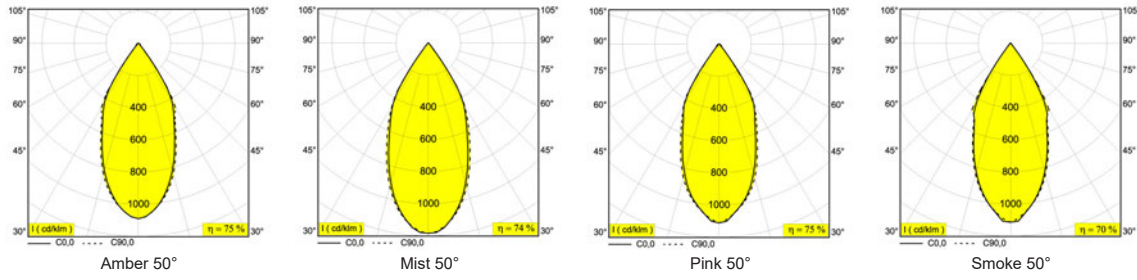


MILES C2 LED

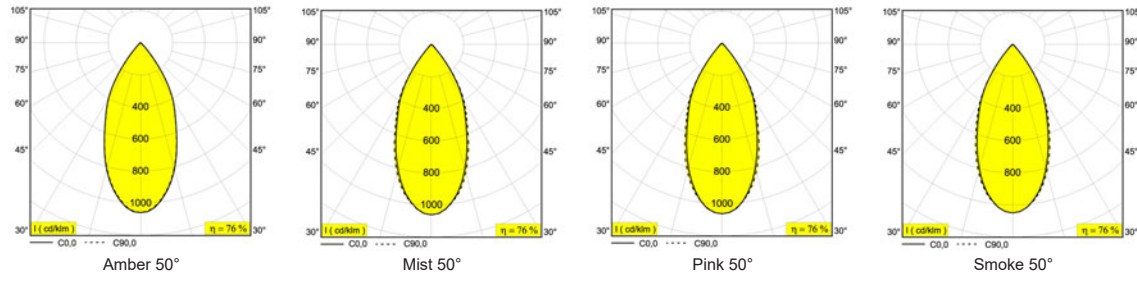

MILES C3 LED

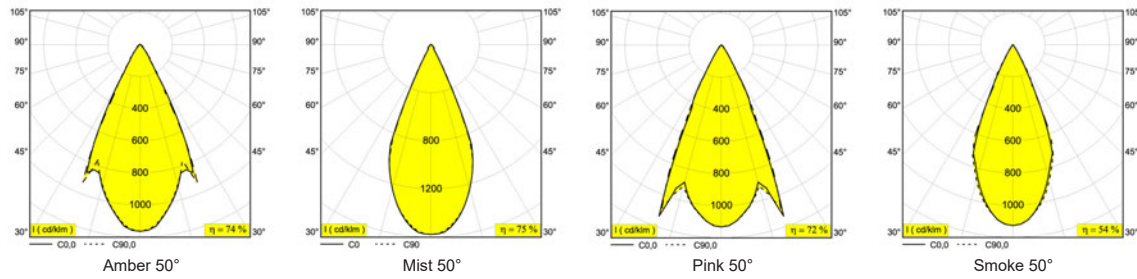

MILES C4 LED

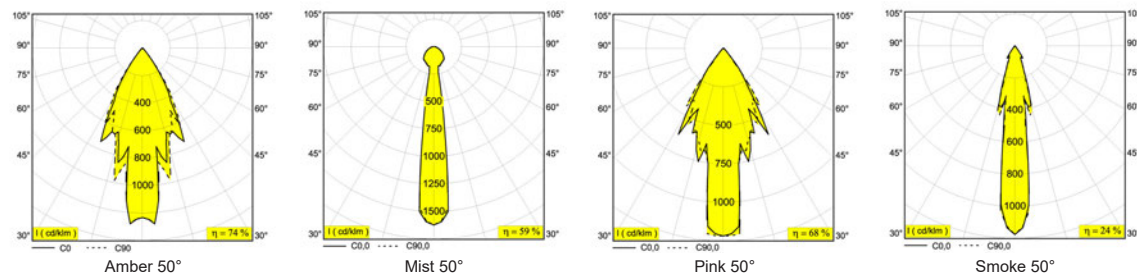




Installation Options

REMOTE DRIVER (With Control D8)

A: 8" x B: 2"-1/2 x C: 2"-1/2
 A: 203mm x B: 64mm x C: 64mm


- For Remote application
- ETL Listed
- Damp rated




REMOTE DRIVER (With Control D1)

A: 8" x B: 2"-3/16 x C: 4"-1/4
 A: 203mm x B: 72mm x C: 108mm

- For Remote application
- ETL Listed
- Damp rated




PRB/PRW - COVERPLATE R 121



Ø108mm
 Ø4" 1/4

BLACK or WHITE
 Requires 4" junction box

PBB - POWER BOX



Requires 4" junction box



BLACK

Driver Options

D1

- Dimming Control 0-10V
- Dimming Range 1-100%
- Dim to off yes at 0.7mA
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥87
- THD @ Full Load <20%
- Title 24 Compliant

Dimmer Compatibility

- Leviton IP710-DLZ
- Lutron DDTV-XX
- WattStopper ADF-120277
- Synergy Lighting Controls ISD BC

D8

- Dimming Control Phase Control
- Dimming Range 10-100%
- Dim to off no
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥78
- THD @ Full Load <12%

Dimmer Compatibility

- Leviton IPE04-1LZ
- Lutron DVELV-300P

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.