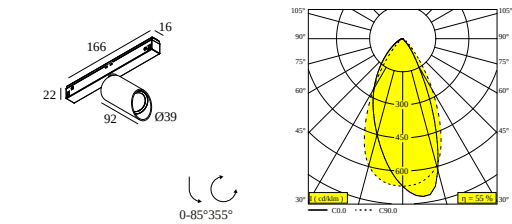




M26L - SPY 39 WALLWASH 930 MDL

23433 9300 BRG

- AVAILABLE IN
- BLACK 23433 9300 B
 - BRUSHED ALU 23433 9300 BRA
 - BRUSHED ANTHRACITE 23433 9300 BRAT
 - BRUSHED COPPER 23433 9300 BRCU
 - BRUSHED GOLD 23433 9300 BRG
 - BRUSHED OLD BRONZE 23433 9300 BROB
 - FLEMISH BRONZE 23433 9300 FBR
 - FLEMISH GOLD 23433 9300 FG
 - GOLD COLOURED 23433 9300 GC
 - WHITE 23433 9300 W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 85° swiveling, 360° rotatable
INFORMATION	WALLWASH LENS EXCL. LED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	E
CERTIFICATES	EPD
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8W / CRI>90 (R9: 52) / 3000K / 787lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	787lm // 5,8W // 135lm/W
LED TECHNICS (LUMINAIRE)	431lm // 6,7W // 65lm/W
Requirements	
LED POWER SUPPLY 48V-DC	
Options	
DIMMABLE MODULATOR	

M26L - SPY 39 WALLWASH 930 MDL

23433 9300 BRC

For detailed installation instructions, please consult the manual : [23433_XXX0_HAND.pdf](#)


FINISH YOUR SPECIFICATION

Current supply

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



21032 0030 SMART 48 MODULATOR PLUG-IN WD

19


Dimtype: WDL = wireless dimmable

SMART 48

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



300 90 011 SMART 48 MODULATOR DIM9

19

Dimtype: 1-10V or DALI or push button



300 90 012 SMART 48 MODULATOR WD

19


Dimtype: WDL = wireless dimmable

LED power supplies

of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN




10

Dimtype: non-dimmable





DELTALIGHT

M26L - SPY 39 WALLWASH 930 MDL

23433 9300 BRC

	300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	24	☐
Dimtype: non-dimmable			
	21012 0230 LED POWER SUPPLY 48V-DC / 100W	10	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 40			
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	20	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 40			

COMPATIBLE COMPOSABLES

SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)	Available Colours
 23358 0000 SLM26L - PROFILE	 
 23358 0010 SLM26L - PROFILE 1m	 
 23358 0020 SLM26L - PROFILE 2m	          
 23358 0030 SLM26L - PROFILE 3m	          

Notes: