




INFORM SQ

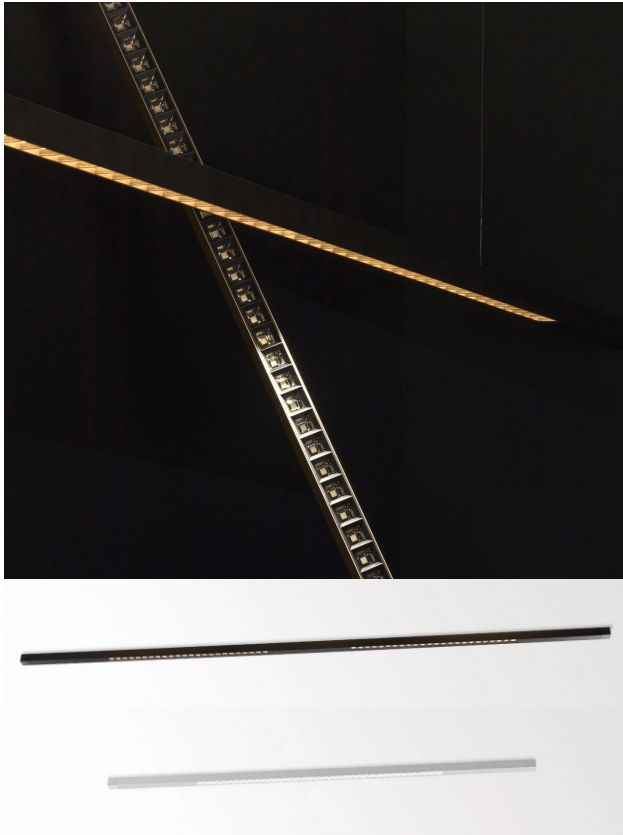

Pure minimalism Inform SQ breaths refinement in all its aspects. Its slender dimensions of 1.1" by 1.1" weld in seamlessly in any architecture. The subtle details empower its sublime design: the recessed endcaps with integrated logo, the multiple colour combinations, all of them adding to the pure minimalism where Inform SQ stands for. Despite its minimalistic design, Inform SQ does not compromise on performance. With a delivered lumen package downwards of up to 3045 lm per meter, Inform SQ is perfect for illuminating task areas like office desks or reception counters.

Specification	
LED Aperture:	5/8"
Installation Method:	4" junction box
Adjustability:	Fixed
Rating:	Damp

Performance	
CRI / TM-30 (3000K):	90 / Rf: 92 / Rg: 100
SDCM / UGR:	3 / <19
LED Maintenance:	L80>60,000h

Delivered Lumens	*Power (Down/Up)	2700K (Down/Up)	3000K (Down/Up)	3500K (Down/Up)
Inform L14 MP Down:	19.2W	1917	2021	2096
Inform L14 MP Down-Up:	12.1W / 16.2W	1288 / 1366	1358 / 1440	1410 / 1495
Inform L14 HP Down:	32.1W	3195	3368	3494
Inform L14 HP Down-Up:	20.2W / 16.2W	2147 / 1366	2264 / 1440	2351 / 1495
Inform L20 MP Down:	25.8W	2556	2694	2795
Inform L20 MP Down-Up:	16.2W / 24.3W	1718 / 2048	1811 / 2159	1881 / 2242
Inform L20 HP Down:	45W	4473	4715	4891
Inform L20 HP Down-Up:	28.3W / 24.3W	3006 / 2048	3170 / 2159	3291 / 2242
Inform L28 MP Down:	38.6W	3834	4041	4193
Inform L28 MP Down-Up:	24.2W / 32.3W	2577 / 2730	2717 / 2879	2821 / 2989
Inform L28 HP Down:	64.2W	6390	6736	6987
Inform L28 HP Down-Up:	40.5W / 32.3W	4294 / 2730	4528 / 2879	4701 / 2989

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: INFL28-HPDN35-B-FG-PCNAPBD1-UNV-W

Luminaire	Shape	Length	Power*	Direction*	CCT	Finish	Style	Installation	Application	Controls***	Hardware Finish ⁵
INF INFORM	L Linear 28 x 29mm 1 1/2" x 1 1/8"	14 Linear 1400mm / 56 11/16" 20 Linear 2000mm / 78 7/16" 28 Linear 2820mm / 111 1/32"	MP Medium Power 67° HP High Power 67°	DN Downlight only, no uplight DU ¹ Downlight with batwing uplight	27 2700K 30 3000K 35 3500K	B-B Black- Black B-FG Black- Flemish Gold W-B White- Black W-W White- White	ON ¹ Surface mount PC ² Pendant, 5' cables	PS Rectangular coverplate for 4" junction box NA ³ No optional accessory PR Round coverplate for 4" junction box PS Square coverplate for 4" junction box NA ³ No optional accessory MK Mud kit into drywall over 4" junction box NA No accessory; utilizing 1/2" EMT install	RMT ⁴ Remote Power Supply PB Power Box	D1-UNV 0-10V dim 120-277V	B Black W White X No hardware finish

¹ Surface mount (Style ON) must be DN Downlight only, no uplight.
² Length 14 & 20 have 2 suspension points; Length 28 has 3 suspension points.
³ Hardware Finish X for Installation NA Application RMT only.

⁴ Remote power supplies are sized to power one luminaire, including down/up.
⁵ Applies to Installation PS & PR (coverplate) & PB (Power Box).
 *** Contact factory for Dali, DMX, or other dimming options.

Related Products

M-Inform (mounts to recessed, surface, or suspended low voltage system), Inform R (round), Inform 40 SQ (linear), Conform, Lass-Oh, Lass-Oh L (linear)

DELTALIGHT


www.deltalight.com



Finish Options

INFORM L14 MP 28mm 1"-3/32 29mm 1"-1/8 1440mm 56"-11/16 STYLE ON 28mm 1"-3/32 29mm 1"-1/8 1440mm 56"-11/16 STYLE PC	INFORM L14 HP 28mm 1"-3/32 29mm 1"-1/8 1440mm 56"-11/16 STYLE ON 28mm 1"-3/32 29mm 1"-1/8 1440mm 56"-11/16 STYLE PC
INFORM L20 MP 28mm 1"-3/32 29mm 1"-1/8 1992mm 78"-7/16 STYLE ON 28mm 1"-3/32 29mm 1"-1/8 1992mm 78"-7/16 STYLE PC	INFORM L20 HP 28mm 1"-3/32 29mm 1"-1/8 1992mm 78"-7/16 STYLE ON 28mm 1"-3/32 29mm 1"-1/8 1992mm 78"-7/16 STYLE PC
INFORM L28 MP 28mm 1"-3/32 29mm 1"-1/8 2820mm 111"-1/32 STYLE ON 28mm 1"-3/32 29mm 1"-1/8 2820mm 111"-1/32 STYLE PC	INFORM L28 HP 28mm 1"-3/32 29mm 1"-1/8 2820mm 111"-1/32 STYLE ON 28mm 1"-3/32 29mm 1"-1/8 2820mm 111"-1/32 STYLE PC

FINISH

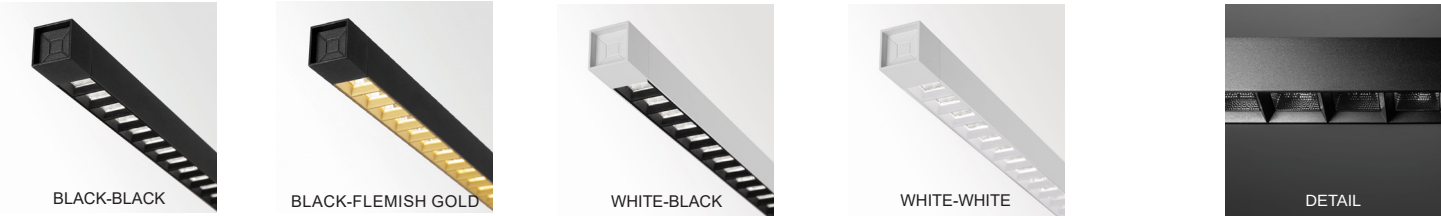

Photometric Data

INFORM L DOWN 67° downlight	INFORM L DOWN-UP 67° downlight, batwing uplight
--	--




Installation Options

REMOTE DRIVER

REMOTE DRIVER (With INFORM L28 HP DOWN)


A: 8" x B: 2"-3/16 x C: 4"-1/4
A: 203mm x B: 72mm x C: 108mm

- For Remote application
- ETL Listed
- Damp rated



A: 8" x B: 3" x C: 2"-7/8
A: 203mm x B: 76mm x C: 72mm

- For Remote application
- ETL Listed
- Damp rated




ONPS - COVERPLATE S 129


PCPR - COVERPLATE R 212

PCPS - COVERPLATE S 126


PCMK - MUD KIT 3




BLACK or WHITE
Requires 4" junction box
Used with STYLE ON



BLACK or WHITE
Requires 4" junction box
Used with STYLE PC




BLACK or WHITE
Requires 4" junction box
Used with STYLE PC



Requires 4" junction box

PB - POWER BOX



Driver Options

D1

- Dimming Control 0-10V
- Dimming Range 1-100%
- Dim to off yes at 0.7mA
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥87
- THD @ Full Load <20%
- Title 24 Compliant

Dimmer Compatibility

- Leviton IP710-DLZ
- Lutron DDTV-XX
- WattStopper ADF-120277
- Synergy Lighting Controls ISD BC

D1 (With INFORM L28 HP DOWN)

- Dimming Control 0-10V
- Dimming Range 1-100%
- Dim to off yes
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥85
- THD @ Full Load <20%

Dimmer Compatibility

- Leviton IP710-DLZ
- Lutron DDTV-XX

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.