




LUNELLE 52 ON 2 48V 93030 MDL

32814 9320 BRA-B

- AVAILABLE IN
- BRUSHED ALU-BLACK 32814 9320 BRA-B
 - BRUSHED ANTHRACITE-BLACK 32814 9320 BRAT-B
 - BRUSHED BROWN BRONZE BLACK 32814 9320 BRBB-B
 - BRUSHED COPPER-BLACK 32814 9320 BRCU-B
 - BRUSHED GOLD-BLACK 32814 9320 BRG-B
 - BRUSHED OLD BRONZE-BLACK 32814 9320 BROB-B

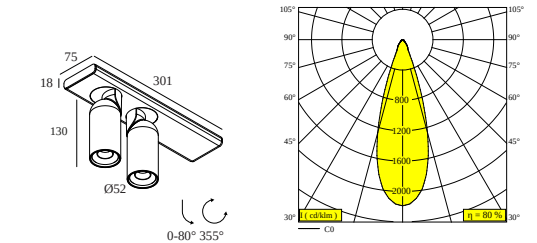

[View on website](#)




General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.8
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	F
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED 5,6W / CRI>90 / 3000K / 519lm
SDCM	SDCM3
RISKGROUP	RG2
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	519lm // 5,6W // 92lm/W
LED TECHNICS (LUMINAIRE)	415lm // 6,4W // 64lm/W
Requirements	
LED POWER SUPPLY 48V-DC	
Options	
DIMMABLE MODULATOR	
Accessories	
VISOR 52	

For detailed installation instructions, please consult the manual : [32814_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION


SMART 48



300 90 011 SMART 48 MODULATOR DIM9

☐

Dimtype: 1-10V or DALI or push button




300 90 012 SMART 48 MODULATOR WD

☐

Dimtype: WDL = wireless dimmable

LED power supplies



21032 0390 LED POWER SUPPLY 48V-DC / 90W

☐

Dimtype: non-dimmable

Cutout dimension (mm): 75



21032 0600 LED POWER SUPPLY 48V-DC / 35W

☐

Dimtype: non-dimmable

Cutout dimension (mm): 40

Light altering devices



32810 0010 DC VISOR 52 DC

☐

Notes: