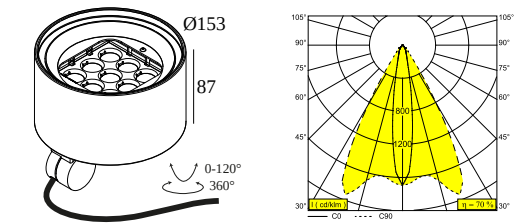




FRAX MB 927 LINEAR H

26010 9240 FBRX

AVAILABLE IN
FLEMISH BRONZE OUTDOOR 26010 9240 FBRX
ANTHRACITE 26010 9240 N
PINE GREEN 26010 9240 PGR



 [View on website](#)



General info	
LOCATION	outdoor
INSTALLATION	Floor Surface mounted,Wall Surface mounted
INGRESS PROTECTION	IP65
PROTECTION AGAINST MECHANICAL IMPACT	IK08
WEIGHT (KG)	2.1
ADJUSTABILITY	0° to 120° swiveling, 360° rotatable
INFORMATION	9 x LENS SP-14° INCL.LED POWER SUPPLY 900mA-DC INCL.LINEAR SPREAD LENS HORIZONTAL Oval spread 15°-60° INCL.1 x CABLE H05 RN-F 3 x 1mm² 2m

Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	F
CERTIFICATES	CB, ENEC, EPD, RCM

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 23,4W / CRI>90 (R9: 50) / 2700K / 2423lm
TM-30 VALUES	Rf: 91 / Rg: 100
SDCM	SDCM3
RISKGROUP	RG2
LM80	L80 > 150000
BEAMANGLE	14°
LED TECHNICS (LIGHT SOURCE)	2423lm // 23,4W // 103lm/W
LED TECHNICS (LUMINAIRE)	1696lm // 26,9W // 63lm/W

Requirements
FRAX BRACKET
FRAX PIN
FRAX STRAP

Options
FRAX ANTI VANDAL SCREWS

Accessories
FRAX M KAP

DELTALIGHT


FRAX MB 927 LINEAR H

26010 9240 FBRX


For detailed installation instructions, please consult the manual : [26010_XX40_HAND.pdf](#)

FINISH YOUR SPECIFICATION


Pins and plates for bollards

	26070 0040 FBRX FRAX PIN FBRX	☐
	26070 0040 N FRAX PIN N	☐
	26070 0040 PGR FRAX PIN PGR	☐

Fixation components

	26070 0060 FBRX FRAX BRACKET FBRX	☐
	26070 0060 N FRAX BRACKET N	☐
	26070 0060 PGR FRAX BRACKET PGR	☐

Light altering devices


	26070 0020 N FRAX M KAP N	☐
--	----------------------------------	--------------------------

DELTALIGHT


FRAX MB 927 LINEAR H

26010 9240 FBRX

Other



26070 0030 FRAX ANTI VANDAL SCREWS 5 PCS

☐

26070 0050 N FRAX STRAP N

☐

Notes: