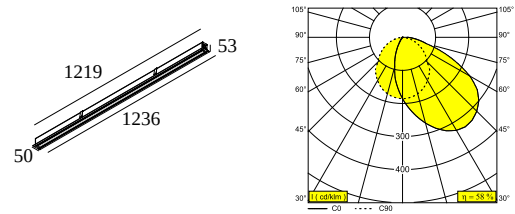




DOT.COM L WALLWASH 12 ST 927
HO

11524 9200 W-B

AVAILABLE IN
WHITE-BLACK 11524 9200 W-B



 [View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - 1224 x 40
RECESSED DEPTH (MM)	50
THICKNESS OF MOUNTING SURFACE (MM)	min.10
INGRESS PROTECTION	IP20
WEIGHT (KG)	2.6
ADJUSTABILITY	non adjustable
INFORMATION	EXCL.LED POWER SUPPLY 700mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, LCA

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED flex 25,2W / CRI>90 (R9: 60) / 2700K / 3000lm
SDCM	SDCM3
LM80	L70 > 30000
LED TECHNICS (LIGHT SOURCE)	3000lm // 25,2W // 119lm/W
LED TECHNICS (LUMINAIRE)	1738lm // 29W // 60lm/W

Requirements



LED POWER SUPPLY 700mA-DC DIM

For detailed installation instructions, please consult the manual : [11524_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Concrete	-
 Concrete + plaster	-
 Lintel + plaster	-
 Hollow-core slab	-
 Hollow-core slab + plaster	-
 Stretched ceiling	-











FINISH YOUR SPECIFICATION

LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
	300 48 700 ED1 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1 Dimtype: 1-10V Cutout dimension (mm): 30	1
	300 48 700 ED5 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5 Dimtype: DALI Cutout dimension (mm): 45	1

DELTALIGHT











DOT.COM L WALLWASH 12 ST 927 HO

11524 9200 W-B

	<u>300 48 700 MDL</u> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL	1	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 30			
	<u>300 48 700 PRO ED1</u> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W PRO DIM1	1	☐
Dimtype: 1-10V			
Cutout dimension (mm): 30			
	<u>300 48 700 PRO ED5</u> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W PRO DIM5	1	☐
Dimtype: DALI			
Cutout dimension (mm): 45			
	<u>300 48 700 PRO WDL</u> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W PRO WDL	1	☐
Dimtype: WDL = wireless dimmable			
Cutout dimension (mm): 45			
	<u>300 48 700 WDL</u> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL	1	☐
Dimtype: WDL = wireless dimmable			
Cutout dimension (mm): 45			
	<u>300 90 61</u> LED POWER SUPPLY MULTI-POWER DIM6	1	☐
Dimtype: mains (phase cut-off) or push button			
Cutout dimension (mm): 56			
	<u>300 90 63</u> LED POWER SUPPLY MULTI-POWER DIM9	2(1)	☐
Dimtype: 1-10V or DALI or push button			
Cutout dimension (mm): 82			
	<u>300 90 64</u> LED POWER SUPPLY MULTI-POWER DIM7	1(0)	☐
Dimtype: 1-10V or push button			
Cutout dimension (mm): 72			
	<u>300 90 67</u> LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9	1	☐
Dimtype: 1-10V or DALI or push button			
	<u>300 90 68</u> LED POWER SUPPLY MULTI-POWER DIM5	1(0)	☐
Dimtype: DALI			
Cutout dimension (mm): 72			

DOT.COM L WALLWASH 12 ST 927 HO

11524 9200 W-B

	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	2(1)	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	2	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	1	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	1	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	1	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	2(1)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	1	☐
	21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5 Dimtype: DALI Cutout dimension (mm): 30	1	☐
	21032 0385 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W PRO DIM5 Dimtype: DALI Cutout dimension (mm): 30	1	☐

DELTALIGHT

DOT.COM L WALLWASH 12 ST 927 HO

11524 9200 W-B

Notes: