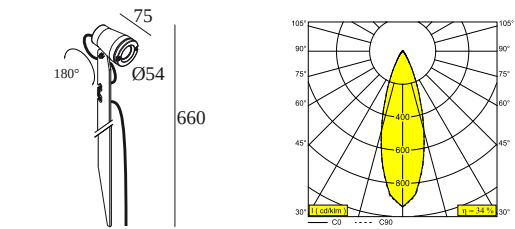




KIX M PIN 92733

232 13 923 PGR

AVAILABLE IN
ALU GREY 232 13 923 A
ANTHRACITE 232 13 923 N
PINE GREEN 232 13 923 PGR



 [View on website](#)



General info	
LOCATION	outdoor
INSTALLATION	Floor Surface mounted
INGRESS PROTECTION	IP55
PROTECTION AGAINST MECHANICAL IMPACT	IK03
WEIGHT (KG)	0.6
ADJUSTABILITY	0° to 90° swiveling
INFORMATION	LENS FL-30° INCL.1 x CABLE H05 RN-F 2 x 1 mm² 2m EXCL.LED POWER SUPPLY 350mA-DC INCL.KAP STRIPER B (removable)

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6,4W / CRI>90 / 2700K / 587lm
SDCM	SDCM2
RISKGROUP	RG1
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	587lm // 6,4W // 92lm/W
LED TECHNICS (LUMINAIRE)	199lm // 7W // 27lm/W

Requirements	
LED POWER SUPPLY 350mA-DC DIM	

Options	
CBOX	
IP68 CONNECTION KIT	
IP68 CONNECTOR 3P	

For detailed installation instructions, please consult the manual : [232 13 9XX_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

2

Dimtype: 1-10V

Cutout dimension (mm): 30




300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

2

Dimtype: DALI

Cutout dimension (mm): 45




300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL

2

Dimtype: non-dimmable

Cutout dimension (mm): 30




300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL

2

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45




300 90 61 LED POWER SUPPLY MULTI-POWER DIM6

2

Dimtype: mains (phase cut-off) or push button

Cutout dimension (mm): 56




300 90 63 LED POWER SUPPLY MULTI-POWER DIM9

4(3)

Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 82




300 90 64 LED POWER SUPPLY MULTI-POWER DIM7

2(2)

Dimtype: 1-10V or push button

Cutout dimension (mm): 72













300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9

2

Dimtype: 1-10V or DALI or push button

KIX M PIN 92733









232 13 923 PGR

	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	2(2) ☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	2->6(6) ☐
	300 90 108 LED POWER SUPPLY 350mA-DC / 8W Dimtype: non-dimmable Cutout dimension (mm): 40	1 ☐
	300 90 116 LED POWER SUPPLY 350mA-DC / 18W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	2->2 ☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	2(2) ☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	2(2) ☐
	300 90 134 LED POWER SUPPLY MULTI-POWER HV DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 84	2->5(5) - ☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	3->4 ☐
	300 90 3112 LED POWER SUPPLY 350mA-DC / 16W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 43	2 ☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	2 ☐

DELTALIGHT

KIX M PIN 92733

232 13 923 PGR


	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	2	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	2	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	3(3)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	2	☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	1	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	2->2	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	2	☐
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 40	1	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68 Dimtype: non-dimmable Cutout dimension (mm): 60	2(2)	☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 Dimtype: DALI Cutout dimension (mm): 30	2	☐

Waterproof connection parts

of Fixtures


 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



216 12 00 CBOX


Cutout dimension (mm): 142 x 142



216 12 01 IP68 CONNECTION KIT



216 12 02 IP68 CONNECTOR 3P



216 14 35 CBOX 350 mA / 10W

Dimtype: non-dimmable

Cutout dimension (mm): 142 x 142

1

Notes: