

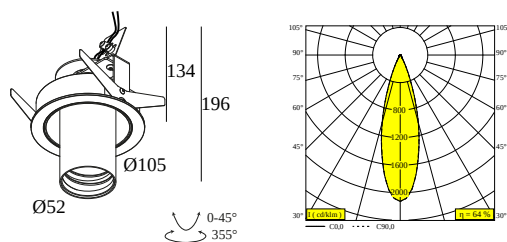


SPY 52 ST 93030

19814 9340 W-W

AVAILABLE IN

WHITE-WHITE 19814 9340 W-W



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 98
RECESSED DEPTH (MM)	80
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.6
ADJUSTABILITY	0° to 45° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-30° EXCL.LED POWER SUPPLY 350-700mA-DC Optional REFLECTORS 20° & 45° available

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8-12,4W / CRI>90 (R9: 52) / 3000K / 787-1467lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	1467lm // 12,4W // 118lm/W
LED TECHNICS (LUMINAIRE)	936lm // 14,3W // 66lm/W

Remarks

Max.500mA when using accessories

Requirements

SPY 52 TUBE

LED POWER SUPPLY 350 / 500 / 700mA-DC DIM

Accessories

HONEYCOMB 42

SPREAD LENS 42

LINEAR SPREAD LENS 42

SOFTENING LENS 42

SPY 52 ST 93030

19814 9340 W-W

GLASS SBL 42


For detailed installation instructions, please consult the manual : [19814_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Wood	-
 Stretched ceiling	-

FINISH YOUR SPECIFICATION


Emergency units

	21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B	☐
	21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W	☐

LED power supplies











of Fixtures
Min current Max current

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

	300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1	2 ☐
	Dimtype: 1-10V	
	Cutout dimension (mm): 30	











SPY 52 ST 93030

19814 9340 W-W

	300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 Dimtype: DALI Cutout dimension (mm): 45	2	☐
	300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL Dimtype: non-dimmable Cutout dimension (mm): 30	2	☐
	300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 45	2	☐
	300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1 Dimtype: 1-10V Cutout dimension (mm): 30	2	☐
	300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 Dimtype: DALI Cutout dimension (mm): 45	2	☐
	300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL Dimtype: non-dimmable Cutout dimension (mm): 30	2	☐
	300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 45	2	☐
	300 48 700 ED1 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1 Dimtype: 1-10V Cutout dimension (mm): 30	2	☐
	300 48 700 ED5 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5 Dimtype: DALI Cutout dimension (mm): 45	2	☐
	300 48 700 MDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL Dimtype: non-dimmable Cutout dimension (mm): 30	2	☐

SPY 52 ST 93030











19814 9340 W-W

	300 48 700 WDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 45	2	☐
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: mains (phase cut-off) or push button Cutout dimension (mm): 56	2 2 2	☐
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 82	4(4) 4(4) 4(3)	☐
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 72	2(2) 2(1) 2(1)	☐
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1-10V or DALI or push button	2 - 2	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	2(2) 2(1) 2(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	2->6(6) 6(4) 4(3)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	3(2) 2(1) 1(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	2(2) 2(1) 1(1)	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	3->4 2->4 2->4	☐

DELTALIGHT

SPY 52 ST 93030









19814 9340 W-W

	21012 0010	LED POWER SUPPLY MULTI POWER	2 2 2	☐
Dimtype: non-dimmable				
Cutout dimension (mm): 50				
	21012 0021	LED POWER SUPPLY MULTI POWER DIM1	3 3 2	☐
Dimtype: 1-10V				
Cutout dimension (mm): 54				
	21012 0035	LED POWER SUPPLY MULTI POWER DIM5	3 3 3	☐
Dimtype: DALI				
Cutout dimension (mm): 54				
	21012 004W	LED POWER SUPPLY MULTI-POWER WDL	4(4) 3(3) 3(3)	☐
Dimtype: WDL = wireless dimmable				
Cutout dimension (mm): 84				
	21012 005W	LED POWER SUPPLY MULTI-POWER COMPACT WDL	3 3 2	☐
Dimtype: WDL = wireless dimmable				
Cutout dimension (mm): 54				
	21012 0268	LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	2->2 0 0	☐
Dimtype: mains (phase cut-off)				
Cutout dimension (mm): 50				
	21012 0278	LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	1 1	☐
Dimtype: mains (phase cut-off)				
Cutout dimension (mm): 55				
	21012 0288	LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	2->3 2->2	☐
Dimtype: mains (phase cut-off)				
Cutout dimension (mm): 55				
	21012 0298	LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	2 2 1	☐
Dimtype: mains (phase cut-off)				
Cutout dimension (mm): 48				
	21012 0308	LED POWER SUPPLY 350mA / 7,35W DIM8	1	☐
Dimtype: mains (phase cut-off)				
Cutout dimension (mm): 40				


DELTALIGHT

SPY 52 ST 93030

19814 9340 W-W

	21012 0318 LED POWER SUPPLY 500mA / 10W DIM8	1	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 40			
	21012 0328 LED POWER SUPPLY 700mA / 15W DIM8	1	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 40			
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	2(2)	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 60			
	21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68	2(1)	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 60			
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	2(1)	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 60			
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	2	☐
Dimtype: DALI			
Cutout dimension (mm): 30			
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	2	☐
Dimtype: DALI			
Cutout dimension (mm): 30			
	21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	2	☐
Dimtype: DALI			
Cutout dimension (mm): 30			


Light altering devices

	19810 0010 B HONEYCOMB 42 SINGLE USE B	☐
--	---	--------------------------


DELTALIGHT

SPY 52 ST 93030

19814 9340 W-W




19810 0020 LINEAR SPREAD LENS 42

☐


19810 0030 SPREAD LENS 42

☐

19810 0040 SOFTENING LENS 42

☐


19810 0050 GLASS SBL 42

☐

19810 0060 B HONEYCOMB 42 DOUBLE USE B

☐

Finish your product



19810 0100 B SPY 52 TUBE B

☐

19810 0100 FBR SPY 52 TUBE FBR

☐

19810 0100 FG SPY 52 TUBE FG

☐

19810 0100 GC SPY 52 TUBE GC

☐

19810 0100 W SPY 52 TUBE W

☐

DELTALIGHT

SPY 52 ST 93030

19814 9340 W-W

Replaceable reflector / lens

	19810 0180 SPY 52 REFLECTOR 20°	☐
	19810 0190 SPY 52 REFLECTOR 45°	☐
	19810 0240 SPY 52 REFLECTOR 30°	☐

Notes: