




M20/M26H - SPY 66 93045 DIM5

23328 9335 W

AVAILABLE IN
BLACK 23328 9335 B
WHITE 23328 9335 W

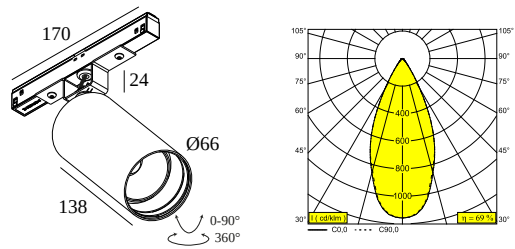

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.6
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	REFLECTOR WFL-45° EXCL.LED POWER SUPPLY 48V-DC Optional REFLECTORS 18° & 30° available

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD, LCA

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 25W / CRI>90 (R9: 52) / 3000K / 2811lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	45°
LED TECHNICS (LIGHT SOURCE)	2811lm // 25W // 112lm/W
LED TECHNICS (LUMINAIRE)	1929lm // 28,8W // 67lm/W

Remarks
Take a look at our MAGNETIC PROFILES movie

Requirements
SPY 66 TUBE LED POWER SUPPLY 48V-DC

Accessories
HONEYCOMB 57

M20/M26H - SPY 66 93045 DIM5

23328 9335 W

For detailed installation instructions, please consult the manual : [23328_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies		# of Fixtures
# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
55 100 90 300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN Dimtype: non-dimmable	3	
63 114 125 300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN Dimtype: non-dimmable	8	
17 298 30 21012 0230 LED POWER SUPPLY 48V-DC / 100W Dimtype: non-dimmable Cutout dimension (mm): 40	3	
22 392 30 21012 0240 LED POWER SUPPLY 48V-DC / 200W Dimtype: non-dimmable Cutout dimension (mm): 40	7	
Light altering devices		
14 Ø57 24611 0150 B HONEYCOMB 57 SINGLE USE B		

DELTALIGHT

M20/M26H - SPY 66 93045 DIM5

23328 9335 W

Finish your product



24611 0100 B SPY 66 TUBE B

☐

24611 0100 FBR SPY 66 TUBE FBR

☐

24611 0100 FG SPY 66 TUBE FG

☐

24611 0100 GC SPY 66 TUBE GC

☐

24611 0100 W SPY 66 TUBE W

☐

Replaceable reflector / lens



24611 0220 SPY 66 REFLECTOR 18°

☐

24611 0230 SPY 66 REFLECTOR 30°

☐

24611 0240 SPY 66 REFLECTOR 45°

☐

COMPATIBLE COMPOSABLES

SHIFTLINE M26H + SBL

Available Colours





30411 9205 SHIFTLINE M26H + SBL 2m DIM5



DELTALIGHT





M20/M26H - SPY 66 93045 DIM5

23328 9335 W

	30411 9305 SHIFTLINE M26H + SBL 2m DIM5	
	30412 9205 SHIFTLINE M26H + SBL 3m DIM5	
	30412 9305 SHIFTLINE M26H + SBL 3m DIM5	
	30413 9205 SHIFTLINE M26H + SBL 4m DIM5	
	30413 9305 SHIFTLINE M26H + SBL 4m DIM5	

SHIFTLINE M26H profile

Available Colours

	23359 0000 SLM26H - PROFILE	
	23359 0010 SLM26H - PROFILE 1m	
	23359 0020 SLM26H - PROFILE 2m	
	23359 0030 SLM26H - PROFILE 3m	

DELTALIGHT

M20/M26H - SPY 66 93045 DIM5

23328 9335 W

SPLITLINE M20 ST profile

Available Colours



23397 0000 SPM20 ST - PROFILE



23397 0020 SPM20 ST - PROFILE 2m




23397 0030 SPM20 ST - PROFILE 3m




SPLITLINE M20 profile


Available Colours




420 20 10 00 SPM20 - PROFILE 1m



420 20 20 00 SPM20 - PROFILE 2m



420 20 30 00 SPM20 - PROFILE 3m



23301 0000 SPM20 - PROFILE B



Notes: