




MULTINOVA 30 PRISM 930 DIM4

27912 9304 B

AVAILABLE IN
BLACK 27912 9304 B
WHITE 27912 9304 W

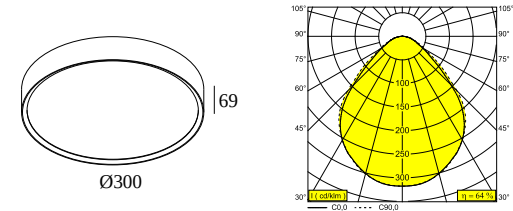

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed,Ceiling Surface mounted,Ceiling Suspended
INGRESS PROTECTION	IP20
WEIGHT (KG)	1.8
ADJUSTABILITY	non adjustable
INFORMATION	INCL.PC PRISMATIC INCL.DIMMABLE LED POWER SUPPLY - 2 power settings
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	DALI or DSI or push button
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, EPD, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	HO: LED cluster 14,9W / CRI>90 (R9: 68) / 3000K / 2174lm Or LED cluster 9,8W / CRI>90 (R9: 68) / 3000K / 1358lm
TM-30 VALUES	Rf: 89 / Rg: 97
SDCM	SDCM3
RISKGROUP	RG0
LM80	L70 > 60000
LED TECHNICS (LIGHT SOURCE)	HO: 2174lm // 14,9W // 146lm/W Or 1358lm // 9,8W // 139lm/W
LED TECHNICS (LUMINAIRE)	HO: 1394lm // 17,1W // 81lm/W Or 871lm // 11,3W // 77lm/W
Options	
MULTINOVA 30 SUSPENSION SET	
MULTINOVA 30 RECESSED KIT	

For detailed installation instructions, please consult the manual : [27912_XXX4_HAND.pdf](#)

DELTALIGHT

MULTINOVA 30 PRISM 930 DIM4


27912 9304 B

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	 27910 0050 - MULTINOVA 30 RECESSED KIT Required
 Plasterboard	 27910 0050 - MULTINOVA 30 RECESSED KIT Required
 Stucanet	 27910 0050 - MULTINOVA 30 RECESSED KIT Required
 Concrete + plaster	 27910 0050 - MULTINOVA 30 RECESSED KIT Required
 Lintel + plaster	 27910 0050 - MULTINOVA 30 RECESSED KIT Required
 Hollow-core slab + plaster	 27910 0050 - MULTINOVA 30 RECESSED KIT Required

FINISH YOUR SPECIFICATION

Recessed kits



27910 0050

MULTINOVA 30 RECESSED KIT

☐



Cutout dimension (mm): 341

Suspension parts



27910 0020 B

MULTINOVA 30 SUSPENSION SET 5x0,75 3m B

☐

27910 0020 W

MULTINOVA 30 SUSPENSION SET 5x0,75 3m W

☐

Notes:

DELTALIGHT

MULTINOVA 30 PRISM 930 DIM4

27912 9304 B