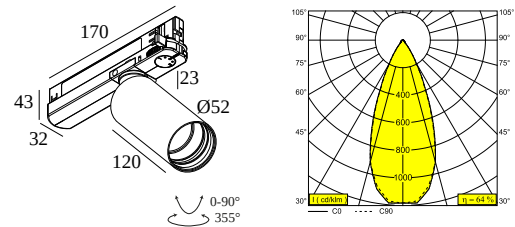




SPY 52 93045 ADM

19834 9330 W

AVAILABLE IN
BLACK 19834 9330 B
FULL WHITE 19834 9330 FW
WHITE 19834 9330 W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Mains voltage track Mains voltage track mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.9
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	REFLECTOR WFL-45° 3F MULTI POWER ADAPTER 700mA Optional REFLECTORS 20° & 30° available

Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, RCM

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 12,4W / CRI>90 (R9: 52) / 3000K / 1467lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	45°
LED TECHNICS (LIGHT SOURCE)	1467lm // 12,4W // 118lm/W
LED TECHNICS (LUMINAIRE)	939lm // 14,3W // 66lm/W

Requirements	
SPY 52 TUBE	
TRACK 3F DIM	

Accessories	
HONEYCOMB 42	
SPREAD LENS 42	
LINEAR SPREAD LENS 42	
SOFTENING LENS 42	
GLASS SBL 42	


For detailed installation instructions, please consult the manual : [19834_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION


Light altering devices



19810 0010 B HONEYCOMB 42 SINGLE USE B

☐


19810 0020 LINEAR SPREAD LENS 42

☐


19810 0030 SPREAD LENS 42

☐

19810 0040 SOFTENING LENS 42

☐


19810 0050 GLASS SBL 42

☐

19810 0060 B HONEYCOMB 42 DOUBLE USE B

☐

Finish your product



19810 0100 B SPY 52 TUBE B

☐

DELTALIGHT

SPY 52 93045 ADM

19834 9330 W

19810 0100 FBR	SPY 52 TUBE FBR	☐
19810 0100 FG	SPY 52 TUBE FG	☐
19810 0100 GC	SPY 52 TUBE GC	☐
19810 0100 W	SPY 52 TUBE W	☐

Replaceable reflector / lens

	19810 0180	SPY 52 REFLECTOR 20°	☐
	19810 0190	SPY 52 REFLECTOR 45°	☐
	19810 0240	SPY 52 REFLECTOR 30°	☐

COMPATIBLE TRACKS

TRACK 3F DIM H			Available Colours
200 14 410	TRACK 3F DIM H 1m	1000 m 1.6 kg	☒ ☐
200 14 420	TRACK 3F DIM H 2m	2000 m 3.2 kg	☒ ☐
200 14 430	TRACK 3F DIM H 3m	3000 m 4.8 kg	☒ ☐
TRACK 3F DIM IN			Available Colours
200 13 410	TRACK 3F DIM IN 1m	1000 m 1.2 kg	☒ ☐
200 13 420	TRACK 3F DIM IN 2m	2000 m 2.4 kg	☒ ☐
200 13 430	TRACK 3F DIM IN 3m	3000 m 3.5 kg	☒ ☐
TRACK 3F DIM ON			Available Colours
200 12 410	TRACK 3F DIM ON 1m	1000 m 1.1 kg	☐ ☒ ☐

DELTALIGHT

SPY 52 93045 ADM

19834 9330 W

200 12 420 TRACK 3F DIM ON 2m	2000 m 2.1 kg	  
200 12 430 TRACK 3F DIM ON 3m	3000 m 3.1 kg	  

Notes: