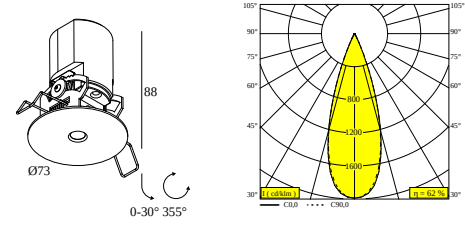




NIME II 93035

REFERENCE 26414 9320 W

AVAILABLE IN
NOIR 26414 9320 B
BLANC 26414 9320 W



 [View on website](#)



General info	
LOCATION	interieur
INSTALLATION	Plafond Encastré
CUTOUT SHAPE/SIZE (MM)	circulaire - 67
RECESSED DEPTH (MM)	90
THICKNESS OF MOUNTING SURFACE (MM)	9,5-12,5
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° à 30° inclinable, 355° rotatif
INFORMATION	LENS FL-35° EXCL.LED POWER SUPPLY 350-700mA-DC

Electrical info	
CLASS	III
DIM TYPE	selon le type d'alimentation externe
ENERGY CLASS	G
CERTIFICATION	CB, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 3,9-8,2W / CRI>90 (R9: 55) / 3000K / 385-677lm
RVALUES	Rf: 92 / Rg: 98
SDMC	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
BEAMANGLE	35°
LED TECHNICS (LIGHT SOURCE)	677lm // 8,2W // 83lm/W
LED TECHNICS (LUMINAIRE)	420lm // 9,4W // 45lm/W

Requirements	
LED POWER SUPPLY 350 / 500 / 700mA-DC DIM	

For detailed installation instructions, please consult the manual : [26414_XXX0_HAND.pdf](#)

NIME II 93035


26414 9320 W

CEILING COMPATIBILITY



Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Stretched ceiling	-

FINISH YOUR SPECIFICATION

les batteries de secours

	21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B	☐
	21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W	☐











les alimentations led

		# of Fixtures
	300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1	3 ☐
	Dimtype: 1 à 10 V	
	Cutout dimension (mm): 30	
	300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	3 ☐
	Dimtype: DALI	
	Cutout dimension (mm): 45	

DELTALIGHT











NIME II 93035

26414 9320 W

	<u>300 48 350 MDL</u> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL	3	☐
	Dimtype: non dimmable Cutout dimension (mm): 30		
	<u>300 48 350 WDL</u> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL	3	☐
	Dimtype: WDL = dimmable sans fil Cutout dimension (mm): 45		
	<u>300 48 500 ED1</u> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1	3	☐
	Dimtype: 1 à 10 V Cutout dimension (mm): 30		
	<u>300 48 500 ED5</u> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	3	☐
	Dimtype: DALI Cutout dimension (mm): 45		
	<u>300 48 500 MDL</u> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL	3	☐
	Dimtype: non dimmable Cutout dimension (mm): 30		
	<u>300 48 500 WDL</u> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL	3	☐
	Dimtype: WDL = dimmable sans fil Cutout dimension (mm): 45		
	<u>300 48 700 ED1</u> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1	3	☐
	Dimtype: 1 à 10 V Cutout dimension (mm): 30		
	<u>300 48 700 ED5</u> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	3	☐
	Dimtype: DALI Cutout dimension (mm): 45		
	<u>300 48 700 MDL</u> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL	3	☐
	Dimtype: non dimmable Cutout dimension (mm): 30		
	<u>300 48 700 WDL</u> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL	3	☐
	Dimtype: WDL = dimmable sans fil Cutout dimension (mm): 45		

NIME II 93035











26414 9320 W

	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: fin de phase ou bouton poussoir Cutout dimension (mm): 56	3 3 3	☐
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1 à 10 V ou DALI ou bouton poussoir Cutout dimension (mm): 82	6(6) 6(6) 6(4)	☐
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1 à 10 V ou bouton poussoir Cutout dimension (mm): 72	2->4(3) 4(2) 3(1)	☐
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1 à 10 V ou DALI ou bouton poussoir	3 3	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	4(3) 4(2) 3(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1 à 10 V ou DALI ou bouton poussoir Cutout dimension (mm): 84	2->9(10) 9(6) 7(4)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1 à 10 V ou bouton poussoir Cutout dimension (mm): 55	2->4(3) 3(2) 2(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	4(3) 3(2) 2(1)	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non dimmable Cutout dimension (mm): 90	5->7 4->7 4->6 3->6	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non dimmable Cutout dimension (mm): 50	2->3 3 3	☐

DELTALIGHT

NIME II 93035




26414 9320 W

	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1 à 10 V Cutout dimension (mm): 54	4 4 4	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	4 4 4	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = dimmable sans fil Cutout dimension (mm): 84	6(6) 5(5) 5(4)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = dimmable sans fil Cutout dimension (mm): 54	4 4 4	☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8 Dimtype: fin de phase Cutout dimension (mm): 50	2->2	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: fin de phase Cutout dimension (mm): 50	3->3	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: fin de phase Cutout dimension (mm): 55	2->2 2->2	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: fin de phase Cutout dimension (mm): 55	3->4 3->4	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: fin de phase Cutout dimension (mm): 48	3 3 2	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68 Dimtype: non dimmable Cutout dimension (mm): 60	4(3)	☐

DELTALIGHT

NIME II 93035

26414 9320 W

	<u>21012 0490</u> LED POWER SUPPLY 700mA-DC / 30W IP68 Dimtype: non dimmable Cutout dimension (mm): 60	3(1) ☐
	<u>21012 0500</u> LED POWER SUPPLY 500mA-DC / 24W IP68 Dimtype: non dimmable Cutout dimension (mm): 60	4(2) ☐
	<u>21032 0295</u> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 Dimtype: DALI Cutout dimension (mm): 30	3 ☐
	<u>21032 0305</u> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 Dimtype: DALI Cutout dimension (mm): 30	3 ☐
	<u>21032 0315</u> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5 Dimtype: DALI Cutout dimension (mm): 30	3 ☐

Notes: