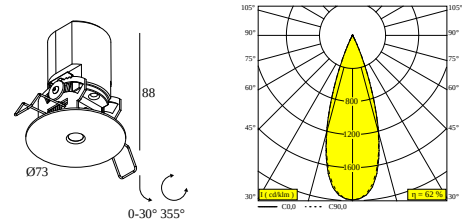




NIME II 93035

26414 9320 W

AVAILABLE IN
BLACK 26414 9320 B
WHITE 26414 9320 W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 67
RECESSED DEPTH (MM)	90
THICKNESS OF MOUNTING SURFACE (MM)	9,5-12,5
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS FL-35° EXCL.LED POWER SUPPLY 350-700mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G
CERTIFICATES	CB, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 3,9-8,2W / CRI>90 (R9: 55) / 3000K / 385-677lm
TM-30 VALUES	Rf: 92 / Rg: 98
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
BEAMANGLE	35°
LED TECHNICS (LIGHT SOURCE)	677lm // 8,2W // 83lm/W
LED TECHNICS (LUMINAIRE)	420lm // 9,4W // 45lm/W

Requirements	
LED POWER SUPPLY 350 / 500 / 700mA-DC DIM	


For detailed installation instructions, please consult the manual : [26414_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Stretched ceiling	-



FINISH YOUR SPECIFICATION

Emergency units

	21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B	☐
	21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W	☐

LED power supplies



of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the 'I' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
	300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1	3 ☐
	Dimtype: 1-10V	
	Cutout dimension (mm): 30	
	300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	3 ☐
	Dimtype: DALI	
	Cutout dimension (mm): 45	

DELTALIGHT


NIME II 93035

26414 9320 W

	300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL	3	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL	3	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1	3	☐
	Dimtype: 1-10V		
	Cutout dimension (mm): 30		
	300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	3	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL	3	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL	3	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 48 700 ED1 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1	3	☐
	Dimtype: 1-10V		
	Cutout dimension (mm): 30		
	300 48 700 ED5 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	3	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	300 48 700 MDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL	3	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 700 WDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL	3	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		

NIME II 93035






26414 9320 W

	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: mains (phase cut-off) or push button Cutout dimension (mm): 56	3 3 3	☐
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 82	6(6) 6(6) 6(4)	☐
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 72	2->4(3) 4(2) 3(1)	☐
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1-10V or DALI or push button	3 3	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	4(3) 4(2) 3(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	2->9(10) 9(6) 7(4)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	2->4(3) 3(2) 2(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	4(3) 3(2) 2(1)	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	5->7 4->7 4->6 3->6	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	2->3 3 3	☐

DELTALIGHT

NIME II 93035






26414 9320 W

	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	4 4 4	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	4 4 4	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	6(6) 5(5) 5(4)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	4 4 4	☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	2->2	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	3->3	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	2->2 2->2	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	3->4 3->4	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	3 3 2	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68 Dimtype: non-dimmable Cutout dimension (mm): 60	4(3)	☐

DELTALIGHT

NIME II 93035

26414 9320 W

	<u>21012 0490</u> LED POWER SUPPLY 700mA-DC / 30W IP68	3(1) ☐
	Dimtype: non-dimmable	
	Cutout dimension (mm): 60	
	<u>21012 0500</u> LED POWER SUPPLY 500mA-DC / 24W IP68	4(2) ☐
	Dimtype: non-dimmable	
	Cutout dimension (mm): 60	
	<u>21032 0295</u> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	3 ☐
	Dimtype: DALI	
	Cutout dimension (mm): 30	
	<u>21032 0305</u> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	3 ☐
	Dimtype: DALI	
	Cutout dimension (mm): 30	
	<u>21032 0315</u> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	3 ☐
	Dimtype: DALI	
	Cutout dimension (mm): 30	

Notes: