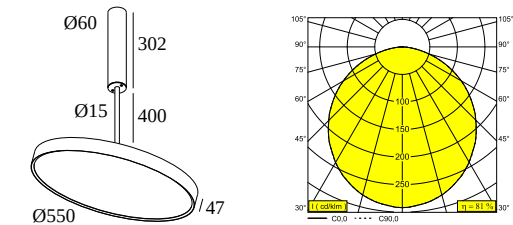




MULTINOVA 55 OK 400 930 DIM4
28022 9304 GC

AVAILABLE IN
BLACK 28022 9304 B
GOLD COLOURED 28022 9304 GC
WHITE 28022 9304 W



 [View on website](#)






General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	8.5
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	INCL.PC SBL ADJUSTABLE 0-90°/355° INCL.DIMMABLE LED POWER SUPPLY
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	DALI or DSI or push button
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 34,4W / CRI>90 (R9: 68) / 3000K / 4767lm
TM-30 VALUES	Rf: 89 / Rg: 97
SDCM	SDCM3
LM80	L70 > 60000
LED TECHNICS (LIGHT SOURCE)	4767lm // 34,4W // 139lm/W
LED TECHNICS (LUMINAIRE)	3842lm // 39,6W // 97lm/W
Options	
COVERSET R 62-90-100	

For detailed installation instructions, please consult the manual : [28022_XXX4_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Coversets

	<u>204 00 62 ANO</u> COVERSET R 62 ANO	☐
	<u>204 00 62 B</u> COVERSET R 62 B	☐
	<u>204 00 62 W</u> COVERSET R 62 W	☐
	<u>204 00 90 ANO</u> COVERSET R 90 ANO	☐
	<u>204 00 90 B</u> COVERSET R 90 B	☐
	<u>204 00 90 W</u> COVERSET R 90 W	☐
	<u>204 00 100 ANO</u> COVERSET R 100 ANO	☐
	<u>204 00 100 B</u> COVERSET R 100 B	☐
	<u>204 00 100 W</u> COVERSET R 100 W	☐

Notes: