




SPYCO 70 93024 ADM DIM5

19920 9325 B

AVAILABLE IN
BLACK 19920 9325 B
FULL WHITE 19920 9325 FW

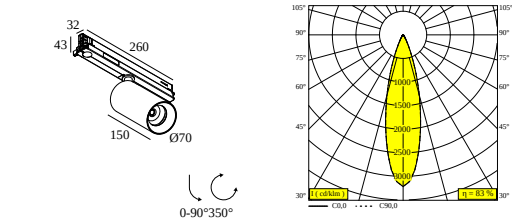

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Mains voltage track Mains voltage track mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.6
ADJUSTABILITY	0° to 90° swiveling, 350° rotatable
INFORMATION	INCL.DIMMABLE LED POWER SUPPLY 450/500mA-DC Max. 450mA with HONEYCOMB
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	EPD, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	@ 500mA: LED array 17,2W / CRI>90 (R9: 52) / 3000K / 2101lm Or @ 450mA (+HONEYCOMB): LED array 15,3W / CRI>90 (R9: 52) / 3000K / 1913lm
TM-30 VALUES	@ 500mA: rf: 90 / Rg: 99 @ 450mA (+HONEYCOMB): rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	24°
LED TECHNICS (LIGHT SOURCE)	@ 500mA: 2101lm // 17,2W // 123lm/W Or @ 450mA (+HONEYCOMB): 1913lm // 15,3W // 125lm/W
LED TECHNICS (LUMINAIRE)	@ 500mA: 1748lm // 19,8W // 88lm/W Or @ 450mA (+HONEYCOMB): 1127lm // 17,6W // 64lm/W
Requirements	
TRACK 3F ON	
Accessories	
SPYCO 70 HONEYCOMB	

For detailed installation instructions, please consult the manual : [19920_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices



19922 0010 B SPYCO 70 HONEYCOMB B



COMPATIBLE TRACKS

TRACK 3F DIM ON			Available Colours	
200 12 410	TRACK 3F DIM ON 1m	1000 m 1.1 kg	  	
200 12 420	TRACK 3F DIM ON 2m	2000 m 2.1 kg	  	
200 12 430	TRACK 3F DIM ON 3m	3000 m 3.1 kg	  	

Notes: