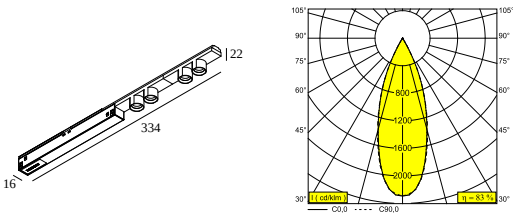




M26L - JUM-OH! 4R 93030 MDL  
29413 9320 B

AVAILABLE IN  
BLACK 29413 9320 B



 [View on website](#)



|                             |                                                        |
|-----------------------------|--------------------------------------------------------|
| General info                |                                                        |
| LOCATION                    | indoor                                                 |
| INSTALLATION                | Low voltage systems Low voltage system mounted         |
| INGRESS PROTECTION          | IP20                                                   |
| WEIGHT (KG)                 | 0.2                                                    |
| ADJUSTABILITY               | non adjustable                                         |
| INFORMATION                 | 4 x REFLECTOR FL-30°<br>EXCL.LED POWER SUPPLY 48V-DC   |
| Electrical info             |                                                        |
| ELECTRICAL                  | 48V-DC                                                 |
| CLASS                       | III                                                    |
| DIM TYPE                    | MDL = 1-10V or DALI or push button                     |
| ENERGY CLASS                | F                                                      |
| CERTIFICATES                | CB, ENEC                                               |
| Lightsource info            |                                                        |
| LIGHTSOURCE NAME            | LED                                                    |
| LIGHTSOURCE                 | 2 x (LED cluster 4W / CRI>90 (R9: 60) / 3000K / 481lm) |
| TM-30 VALUES                | Rf: 92 / Rg: 99                                        |
| SDCM                        | SDCM3                                                  |
| RISKGROUP                   | RG2                                                    |
| LM80                        | L80 > 150000                                           |
| BEAMANGLE                   | 30°                                                    |
| LED TECHNICS (LIGHT SOURCE) | 962lm // 8W // 120lm/W                                 |
| LED TECHNICS (LUMINAIRE)    | 795lm // 9W // 86lm/W                                  |
| Requirements                |                                                        |
| LED POWER SUPPLY 48V-DC     |                                                        |
| Options                     |                                                        |
| DIMMABLE MODULATOR          |                                                        |

For detailed installation instructions, please consult the manual : [29413\\_XXX0\\_HAND.pdf](#)

### FINISH YOUR SPECIFICATION

#### Current supply

#### # of Fixtures



# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



**21032 0030** SMART 48 MODULATOR PLUG-IN WD

20

Dimtype: WDL = wireless dimmable

#### SMART 48

#### # of Fixtures



# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



**300 90 011** SMART 48 MODULATOR DIM9

20

Dimtype: 1-10V or DALI or push button



**300 90 012** SMART 48 MODULATOR WD

20

Dimtype: WDL = wireless dimmable

#### LED power supplies

#### # of Fixtures



# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



**300 89 48 100** LED POWER SUPPLY 48V-DC / 100W DIN

10

Dimtype: non-dimmable



**300 89 48 240** LED POWER SUPPLY 48V-DC / 240W DIN



26

Dimtype: non-dimmable







# DELTALIGHT

## M26L - JUM-OH! 4R 93030 MDL

29413 9320 B

|                                                                                  |                                                  |                             |
|----------------------------------------------------------------------------------|--------------------------------------------------|-----------------------------|
|  | <b>21012 0230</b> LED POWER SUPPLY 48V-DC / 100W | 10 <input type="checkbox"/> |
|                                                                                  | Dimtype: non-dimmable                            |                             |
|                                                                                  | Cutout dimension (mm): 40                        |                             |
|  | <b>21012 0240</b> LED POWER SUPPLY 48V-DC / 200W | 21 <input type="checkbox"/> |
|                                                                                  | Dimtype: non-dimmable                            |                             |
|                                                                                  | Cutout dimension (mm): 40                        |                             |



### COMPATIBLE COMPOSABLES

| SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)                                                                          | Available Colours                                                                     |
|---------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  <b>23358 0000</b> SLM26L - PROFILE      |    |
|  <b>23358 0010</b> SLM26L - PROFILE 1m |  |
|  <b>23358 0020</b> SLM26L - PROFILE 2m |  |
|  <b>23358 0030</b> SLM26L - PROFILE 3m |  |
| SHIFTLINE M35R profile                                                                                                    | Available Colours                                                                     |
|  <b>23375 0000</b> SLM35R - PROFILE    |  |
|  <b>23375 0010</b> SLM35R - PROFILE 1m |  |

# DELTALIGHT

## M26L - JUM-OH! 4R 93030 MDL

29413 9320 B

|                                                                                   |                                       |                                                                                     |
|-----------------------------------------------------------------------------------|---------------------------------------|-------------------------------------------------------------------------------------|
|  | <b>23375 0020</b> SLM35R - PROFILE 2m |  |
|  | <b>23375 0030</b> SLM35R - PROFILE 3m |  |

Notes: