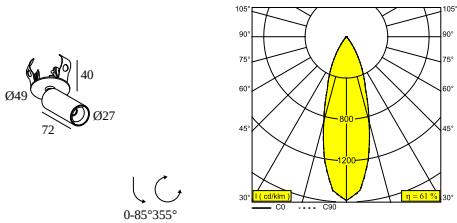




SPY 27 CLIP 93030

24118 9320 W-W

AVAILABLE IN
NOIR-NOIR 24118 9320 B-B
FLEMISH BRONZE-NOIR 24118 9320 FBR-B
FLEMISH GOLD-NOIR 24118 9320 FG-B
ENTIÈREMENT BLANC 24118 9320 FW
COULEUR OR-NOIR 24118 9320 GC-B
BLANC-BLANC 24118 9320 W-W



 [View on website](#)



General info	
LOCATION	interieur
INSTALLATION	Plafond Semi-encastré
CUTOUT SHAPE/SIZE (MM)	circulaire - 43
RECESSED DEPTH (MM)	40
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.2
ADJUSTABILITY	0° à 85° inclinable, 355° rotatif
INFORMATION	REFLECTOR FL-30° EXCLLED POWER SUPPLY 350mA-DC SPY 27 TUBE included (B for all versions W for FW version)

Electrical info	
CLASS	III
DIM TYPE	selon le type d'alimentation externe
ENERGY CLASS	D
CERTIFICATION	CB, ENEC, LCA









Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8W / CRI>90 (R9: 52) / 3000K / 787lm
RVALUES	rf: 90 / Rg: 99
SDMC	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	787lm // 5,8W // 135lm/W
LED TECHNICS (LUMINAIRE)	480lm // 6,7W // 72lm/W

Requirements
LED POWER SUPPLY 350mA-DC DIM

Accessories
VISOR 27

For detailed installation instructions, please consult the manual : [24118_XXX0_HAND.pdf](#)


FINISH YOUR SPECIFICATION

les alimentations led			# of Fixtures
 web2print_power_supply_info_box			Min current Max current
	300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1 Dimtype: 1 à 10 V Cutout dimension (mm): 30	2	☐
	300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 Dimtype: DALI Cutout dimension (mm): 45	2	☐
	300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL Dimtype: non dimmable Cutout dimension (mm): 30	2	☐
	300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL Dimtype: WDL = dimmable sans fil Cutout dimension (mm): 45	2	☐
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: fin de phase ou bouton poussoir Cutout dimension (mm): 56	2	☐
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1 à 10 V ou DALI ou bouton poussoir Cutout dimension (mm): 82	4(4)	☐
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1 à 10 V ou bouton poussoir Cutout dimension (mm): 72	2(2)	☐
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1 à 10 V ou DALI ou bouton poussoir	2	☐

DELTALIGHT

SPY 27 CLIP 93030

24118 9320 W-W



300 90 68


LED POWER SUPPLY MULTI-POWER DIM5

2(2)



Dimtype: DALI

Cutout dimension (mm): 72



300 90 69


LED POWER SUPPLY MULTI-POWER HV DIM9

2->6(6)



Dimtype: 1 à 10 V ou DALI ou bouton poussoir

Cutout dimension (mm): 84



300 90 124


LED POWER SUPPLY MULTI-POWER DIM7

3(2)



Dimtype: 1 à 10 V ou bouton poussoir

Cutout dimension (mm): 55



300 90 125


LED POWER SUPPLY MULTI-POWER MINI DIM5

2(2)



Dimtype: DALI

Cutout dimension (mm): 55



300 90 135


LED POWER SUPPLY MULTI-POWER HV

3->4



Dimtype: non dimmable

Cutout dimension (mm): 90



21012 0010


LED POWER SUPPLY MULTI POWER

2



Dimtype: non dimmable

Cutout dimension (mm): 50



21012 0021


LED POWER SUPPLY MULTI POWER DIM1

3



Dimtype: 1 à 10 V

Cutout dimension (mm): 54



21012 0035


LED POWER SUPPLY MULTI POWER DIM5

3



Dimtype: DALI

Cutout dimension (mm): 54



21012 004W


LED POWER SUPPLY MULTI-POWER WDL

4(4)



Dimtype: WDL = dimmable sans fil

Cutout dimension (mm): 84



21012 005W

LED POWER SUPPLY MULTI-POWER COMPACT WDL

3








Dimtype: WDL = dimmable sans fil

Cutout dimension (mm): 54

DELTALIGHT

SPY 27 CLIP 93030



24118 9320 W-W

	21012 0268	LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	2->2	☐
Dimtype: fin de phase				
Cutout dimension (mm): 50				
	21012 0298	LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	2	☐
Dimtype: fin de phase				
Cutout dimension (mm): 48				
	21012 0308	LED POWER SUPPLY 350mA / 7,35W DIM8	1	☐
Dimtype: fin de phase				
Cutout dimension (mm): 40				
	21012 0480	LED POWER SUPPLY 350mA-DC / 17W IP68	2(2)	☐
Dimtype: non dimmable				
Cutout dimension (mm): 60				
	21032 0295	LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	2	☐
Dimtype: DALI				
Cutout dimension (mm): 30				

modifier les dispositifs de lumière

	24144 0040 B	VISOR 27 B	☐
--	---------------------	------------	--------------------------


COMPATIBLE COMPOSABLES

ZOOVER 4CLIP	Available Colours
	28215 0005 ZOOVER 4CLIP 120 LIGHT GREY DIM5
	28216 0005 ZOOVER 4CLIP 120 DARK GREY DIM5


DELTALIGHT

SPY 27 CLIP 93030

24118 9320 W-W



28217 0005 ZOOVER 4CLIP 140 LIGHT GREY DIMS



28218 0005 ZOOVER 4CLIP 140 DARK GREY DIMS



Notes: