


LUNELLE 52 ON 2 48V 93030 DIM5
32815 9325 BRA-B

AVAILABLE IN
BRUSHED ALU-BLACK 32815 9325 BRA-B
BRUSHED ANTHRACITE-BLACK 32815 9325 BRAT-B
BRUSHED BROWN BRONZE BLACK 32815 9325 BRBB-B
BRUSHED COPPER-BLACK 32815 9325 BRCU-B
BRUSHED GOLD-BLACK 32815 9325 BRG-B
BRUSHED OLD BRONZE-BLACK 32815 9325 BROB-B



 [View on website](#)

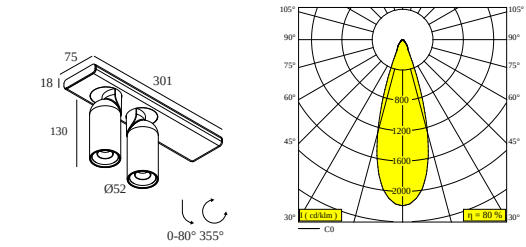


General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.8
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	F
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED 5,6W / CRI>90 / 3000K / 519lm
SDCM	SDCM3
RISKGROUP	RG2
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	519lm // 5,6W // 92lm/W
LED TECHNICS (LUMINAIRE)	415lm // 6,4W // 64lm/W
Requirements	
LED POWER SUPPLY 48V-DC	
Accessories	
VISOR 52	

For detailed installation instructions, please consult the manual : [32815_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION

LED power supplies



21032 0390 LED POWER SUPPLY 48V-DC / 90W

Dimtype: non-dimmable

Cutout dimension (mm): 75

☐


21032 0600 LED POWER SUPPLY 48V-DC / 35W

Dimtype: non-dimmable

Cutout dimension (mm): 40

☐

Light altering devices



32810 0010 DC VISOR 52 DC

☐

Notes: