




LUNELLE 52 SPM20 92730 MDL

32820 9220 BRA

- AVAILABLE IN
- BRUSHED ALU 32820 9220 BRA
 - BRUSHED ALU-BLACK 32820 9220 BRA-B
 - BRUSHED ALU-WHITE 32820 9220 BRA-W
 - BRUSHED ANTHRACITE 32820 9220 BRAT
 - BRUSHED ANTHRACITE-BLACK 32820 9220 BRAT-B
 - BRUSHED ANTHRACITE-WHITE 32820 9220 BRAT-W
 - BRUSHED BROWN BRONZE 32820 9220 BRBB
 - BRUSHED BROWN BRONZE BLACK 32820 9220 BRBB-B
 - BRUSHED BROWN BRONZE WHITE 32820 9220 BRBB-W
 - BRUSHED COPPER 32820 9220 BRCU
 - BRUSHED COPPER-BLACK 32820 9220 BRCU-B
 - BRUSHED COPPER-WHITE 32820 9220 BRCU-W
 - BRUSHED GOLD 32820 9220 BRG
 - BRUSHED OLD BRONZE 32820 9220 BROB

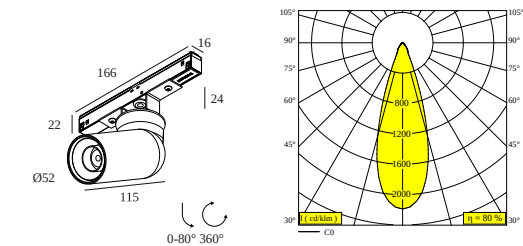

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	G

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED 5,6W / CRI>90 (R9: 80) / 2700K / 485lm
SDMC	SDCM3
RISKGROUP	RG2
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	485lm // 5,6W // 86lm/W
LED TECHNICS (LUMINAIRE)	388lm // 6,4W // 60lm/W

Requirements	
LED POWER SUPPLY 48V-DC	

Options	
DIMMABLE MODULATOR	

Accessories	
VISOR 52	

For detailed installation instructions, please consult the manual : [32820_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices

14



32810 0010 DC

VISOR 52 DC

☐

Notes: