




SPYCO 70 93036 ADM DIM5

19920 9335 B

AVAILABLE IN  
**BLACK** 19920 9335 B  
**FULL WHITE** 19920 9335 FW

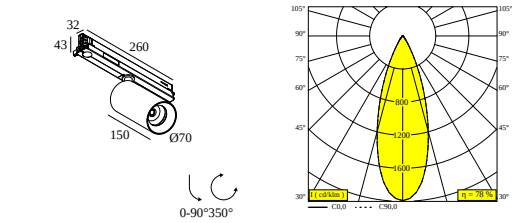

 [View on website](#)



| General info       |                                                                          |
|--------------------|--------------------------------------------------------------------------|
| LOCATION           | indoor                                                                   |
| INSTALLATION       | Mains voltage track Mains voltage track mounted                          |
| INGRESS PROTECTION | IP20                                                                     |
| WEIGHT (KG)        | 0.6                                                                      |
| ADJUSTABILITY      | 0° to 90° swiveling, 350° rotatable                                      |
| INFORMATION        | INCL.DIMMABLE LED POWER SUPPLY 450/500mA-DC<br>Max. 450mA with HONEYCOMB |

| Electrical info |                    |
|-----------------|--------------------|
| ELECTRICAL      | 220-240V / 50-60Hz |
| CLASS           | II                 |
| POWER SUPPLY    | YES                |
| DIM TYPE        | DALI               |
| ENERGY CLASS    | E                  |
| CERTIFICATES    | EPD, RCM           |

| Lightsource info            |                                                                                                                                               |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                                                                                                                           |
| LIGHTSOURCE                 | @ 500mA: LED array 17,2W / CRI>90 (R9: 52) / 3000K / 2101lm<br>Or<br>@ 450mA (+HONEYCOMB): LED array 15,3W / CRI>90 (R9: 52) / 3000K / 1913lm |
| TM-30 VALUES                | @ 500mA: rf: 90 / Rg: 99<br>@ 450mA (+HONEYCOMB): rf: 90 / Rg: 99                                                                             |
| SDCM                        | SDCM1                                                                                                                                         |
| RISKGROUP                   | RG1                                                                                                                                           |
| LM80                        | L90B10 > 50000                                                                                                                                |
| BEAMANGLE                   | 36°                                                                                                                                           |
| LED TECHNICS (LIGHT SOURCE) | @ 500mA: 2101lm // 17,2W // 123lm/W<br>Or<br>@ 450mA (+HONEYCOMB): 1913lm // 15,3W // 125lm/W                                                 |
| LED TECHNICS (LUMINAIRE)    | @ 500mA: 1642lm // 19,8W // 83lm/W<br>Or<br>@ 450mA (+HONEYCOMB): 991lm // 17,6W // 56lm/W                                                    |

| Requirements |
|--------------|
| TRACK 3F ON  |

| Accessories        |
|--------------------|
| SPYCO 70 HONEYCOMB |

For detailed installation instructions, please consult the manual : [19920\\_XXX5\\_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices



**19922 0010 B** SPYCO 70 HONEYCOMB B



COMPATIBLE TRACKS

| TRACK 3F DIM ON   |                    |                 | Available Colours                                                                                                                                                                                                                                                 |  |
|-------------------|--------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <b>200 12 410</b> | TRACK 3F DIM ON 1m | 1000 m   1.1 kg |    |  |
| <b>200 12 420</b> | TRACK 3F DIM ON 2m | 2000 m   2.1 kg |    |  |
| <b>200 12 430</b> | TRACK 3F DIM ON 3m | 3000 m   3.1 kg |    |  |

Notes: