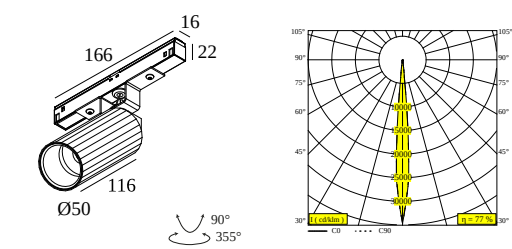




M20/M26H - HEDRA 93008 MDL

23366 9310 BBR

AVAILABLE IN
BLACK BRONZE 23366 9310 BBR
GOLD COLOURED 23366 9310 GC



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	LENS SP-8° EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	F

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,7W / CRI>90 (R9: 55) / 3000K / 519lm
TM-30 VALUES	rf: 92 / Rg: 98
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
BEAMANGLE	8°
LED TECHNICS (LIGHT SOURCE)	519lm // 5,7W // 90lm/W
LED TECHNICS (LUMINAIRE)	397lm // 6,6W // 61lm/W

Remarks
Take a look at our MAGNETIC PROFILES movie

Requirements
VIZIR TUBE
LED POWER SUPPLY 48V-DC

Options
DIMMABLE MODULATOR

Accessories
VIZIR HONEYCOMB
VIZIR SOFTENING LENS

For detailed installation instructions, please consult the manual : [23366_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Current supply

of Fixtures

Min current | Max current

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.



21032 0030 SMART 48 MODULATOR PLUG-IN WD

Dimtype: WDL = wireless dimmable

27

SMART 48

of Fixtures

Min current | Max current

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.



300 90 011 SMART 48 MODULATOR DIM9

Dimtype: 1-10V or DALI or push button

27



300 90 012 SMART 48 MODULATOR WD

Dimtype: WDL = wireless dimmable

27

LED power supplies

of Fixtures

Min current | Max current

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

Dimtype: non-dimmable

14



DELTALIGHT

M20/M26H - HEDRA 93008 MDL

23366 9310 BBR

	300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	34	☐
	Dimtype: non-dimmable		
	21012 0230 LED POWER SUPPLY 48V-DC / 100W	14	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 40		
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	29	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 40		

Light altering devices

	473 03 01 B VIZIR HONEYCOMB B		☐
	473 03 04 VIZIR SOFTENING LENS		☐

Finish your product







	473 01 00 B VIZIR TUBE B		☐
	473 01 00 FBR VIZIR TUBE FBR		☐
	473 01 00 FG VIZIR TUBE FG		☐
	473 01 00 W VIZIR TUBE W		☐

DELTALIGHT

M20/M26H - HEDRA 93008 MDL

23366 9310 BBR



COMPATIBLE COMPOSABLES

SHIFTLINE M26H profile		Available Colours
	23359 0000 SLM26H - PROFILE	 
	23359 0010 SLM26H - PROFILE 1m	 
	23359 0020 SLM26H - PROFILE 2m	         
	23359 0030 SLM26H - PROFILE 3m	         
SPLITLINE M20 ST profile		Available Colours
	23397 0000 SPM20 ST - PROFILE	 
	23397 0020 SPM20 ST - PROFILE 2m	 
	23397 0030 SPM20 ST - PROFILE 3m	 
SPLITLINE M20 profile		Available Colours
	420 20 10 00 SPM20 - PROFILE 1m	
	420 20 20 00 SPM20 - PROFILE 2m	

DELTALIGHT

M20/M26H - HEDRA 93008 MDL

23366 9310 BBR

	420 20 30 00 SPM20 - PROFILE 3m	
	23301 0000 SPM20 - PROFILE B	

Notes: