




OCTAV 39 ON 2 93020 DIM8

29019 9328 W-W

AVAILABLE IN  
**BLACK-BLACK** 29019 9328 B-B  
**WHITE-WHITE** 29019 9328 W-W

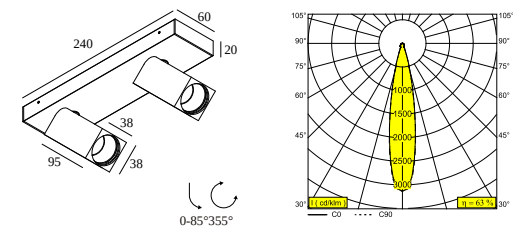

 [View on website](#)



| General info                |                                                                                                                 |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------|
| LOCATION                    | indoor                                                                                                          |
| INSTALLATION                | Ceiling Surface mounted                                                                                         |
| INGRESS PROTECTION          | IP20                                                                                                            |
| WEIGHT (KG)                 | 0.8                                                                                                             |
| ADJUSTABILITY               | 0° to 85° swiveling, 355° rotatable                                                                             |
| INFORMATION                 | REFLECTOR FL-20°<br>INCL.DIMMABLE LED POWER SUPPLY 350/500mA-DC<br>Current selection via jumper on power supply |
| Electrical info             |                                                                                                                 |
| ELECTRICAL                  | 220-240V / 50-60Hz                                                                                              |
| CLASS                       | I                                                                                                               |
| POWER SUPPLY                | YES                                                                                                             |
| DIM TYPE                    | mains (phase cut-off)                                                                                           |
| ENERGY CLASS                | E                                                                                                               |
| CERTIFICATES                | CB, ENEC, RCM                                                                                                   |
| Lightsource info            |                                                                                                                 |
| LIGHTSOURCE NAME            | LED                                                                                                             |
| LIGHTSOURCE                 | 2 x (LED array 8,6W / CRI>90 (R9: 52) / 3000K / 1089lm)                                                         |
| TM-30 VALUES                | rf: 90 / Rg: 99                                                                                                 |
| SDCM                        | SDCM1                                                                                                           |
| RISKGROUP                   | RG1                                                                                                             |
| LM80                        | L90B10 > 50000                                                                                                  |
| BEAMANGLE                   | 20°                                                                                                             |
| LED TECHNICS (LIGHT SOURCE) | 2178lm // 17,2W // 127lm/W                                                                                      |
| LED TECHNICS (LUMINAIRE)    | 1365lm // 19,8W // 69lm/W                                                                                       |
| Requirements                |                                                                                                                 |
| SPY 39 L TUBE               |                                                                                                                 |

For detailed installation instructions, please consult the manual : [29019\\_XXX8\\_HAND.pdf](#)

### FINISH YOUR SPECIFICATION

#### Finish your product

|                                                                                  |                              |                   |                          |
|----------------------------------------------------------------------------------|------------------------------|-------------------|--------------------------|
|  | <b><u>24144 0020 B</u></b>   | SPY 39 L TUBE B   | <input type="checkbox"/> |
|                                                                                  | <b><u>24144 0020 FBR</u></b> | SPY 39 L TUBE FBR | <input type="checkbox"/> |
|                                                                                  | <b><u>24144 0020 FG</u></b>  | SPY 39 L TUBE FG  | <input type="checkbox"/> |
|                                                                                  | <b><u>24144 0020 GC</u></b>  | SPY 39 L TUBE GC  | <input type="checkbox"/> |
|                                                                                  | <b><u>24144 0020 W</u></b>   | SPY 39 L TUBE W   | <input type="checkbox"/> |

Notes: