




**BOXY R OK 93033 DIM8**

251 77 811 932 ED8 B-B

AVAILABLE IN  
**BLACK-BLACK** 251 77 811 932 ED8 B-B  
**BLACK-FLEMISH BRONZE** 251 77 811 932 ED8 B-FBR  
**BLACK-FLEMISH GOLD** 251 77 811 932 ED8 B-FG  
**WHITE-BLACK** 251 77 811 932 ED8 W-B  
**WHITE-WHITE** 251 77 811 932 ED8 W-W

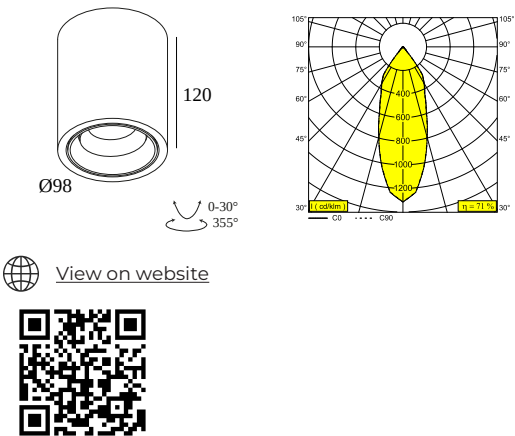

 [View on website](#)




| General info                |                                                             |
|-----------------------------|-------------------------------------------------------------|
| LOCATION                    | indoor                                                      |
| INSTALLATION                | Ceiling Surface mounted                                     |
| INGRESS PROTECTION          | IP20                                                        |
| WEIGHT (KG)                 | 0.9                                                         |
| ADJUSTABILITY               | 0° to 30° swiveling, 355° rotatable                         |
| INFORMATION                 | REFLECTOR FL-33°<br>INCL.DIMMABLE LED POWER SUPPLY 500mA-DC |
| Electrical info             |                                                             |
| ELECTRICAL                  | 220-240V / 50-60Hz                                          |
| CLASS                       | I                                                           |
| POWER SUPPLY                | YES                                                         |
| DIM TYPE                    | mains (phase cut-off)                                       |
| ENERGY CLASS                | D                                                           |
| CERTIFICATES                | CB, ENEC, LCA, RCM                                          |
| Lightsource info            |                                                             |
| LIGHTSOURCE NAME            | LED                                                         |
| LIGHTSOURCE                 | LED array 8,6W / CRI>90 (R9: 52) / 3000K / 1089lm           |
| TM-30 VALUES                | rf: 90 / Rg: 99                                             |
| SDCM                        | SDCM1                                                       |
| RISKGROUP                   | RG1                                                         |
| LM80                        | L90B10 > 50000                                              |
| BEAMANGLE                   | 33°                                                         |
| LED TECHNICS (LIGHT SOURCE) | 1089lm // 8,6W // 127lm/W                                   |
| LED TECHNICS (LUMINAIRE)    | 778lm // 9,9W // 79lm/W                                     |

For detailed installation instructions, please consult the manual : [251.77.811.XXX.HAND.pdf](#)

FINISH YOUR SPECIFICATION

Miscellaneous control equipment



**300 90 004 ED8** WIRELESS CONTROL DIM8

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 40



Notes: