




FRAGMA L SUPERSPOT 9308 ADM
DIM1

23616 9311 B

AVAILABLE IN
NOIR 23616 9311 B
BLANC 23616 9311 W

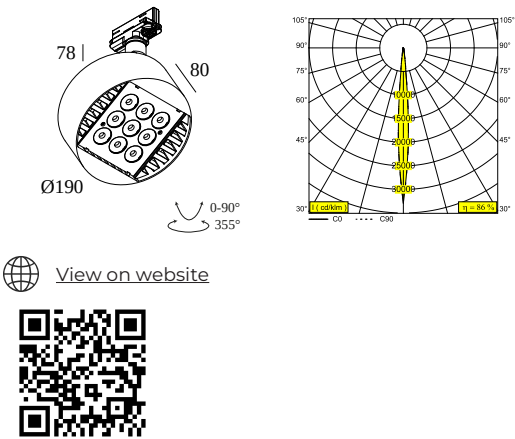

[View on website](#)



General info	
LOCATION	interieur
INSTALLATION	Rail Monté sur rail
INGRESS PROTECTION	IP20
WEIGHT (KG)	1.9
ADJUSTABILITY	0° à 90° inclinable, 355° rotatif
INFORMATION	9 x LENS SP-8° INCLDIMMABLE LED POWER SUPPLY 900mA-DC 3F MULTI ADAPTER
Electrical info	
ELECTRICAL	110-240V / 50-60Hz
CLASS	I
POWER SUPPLY INCLUDED	YES
DIM TYPE	1 à 10 V
ENERGY CLASS	E
CERTIFICATION	CB, ENEC, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 23,4W / CRI>90 (R9: 64) / 3000K / 2654lm
RVALUES	Rf: 92 / Rg: 99
SDMC	SDCM3
RISKGROUP	RG2
LM80	L80 > 150000
BEAMANGLE	8°
LED TECHNICS (LIGHT SOURCE)	2654lm // 23,4W // 113lm/W
LED TECHNICS (LUMINAIRE)	2294lm // 26,9W // 85lm/W
Requirements	
TRACK 3F DIM	
Accessories	
FRAGMA 4X4 HONEYCOMB	


For detailed installation instructions, please consult the manual : [23616_XXX1_HAND.pdf](#)

FRAGMA L SUPERSPOT 9308 ADM DIM1

23616 9311 B

FINISH YOUR SPECIFICATION

modifier les dispositifs de lumière



23613 0220 B FRAGMA L HONEYCOMB B



COMPATIBLE TRACKS

TRACK 3F DIM H			Available Colours
200 14 410	TRACK 3F DIM H 1m	1000 m 1.6 kg	 
200 14 420	TRACK 3F DIM H 2m	2000 m 3.2 kg	 
200 14 430	TRACK 3F DIM H 3m	3000 m 4.8 kg	 
TRACK 3F DIM IN			Available Colours
200 13 410	TRACK 3F DIM IN 1m	1000 m 1.2 kg	 
200 13 420	TRACK 3F DIM IN 2m	2000 m 2.4 kg	 
200 13 430	TRACK 3F DIM IN 3m	3000 m 3.5 kg	 
TRACK 3F DIM ON			Available Colours
200 12 410	TRACK 3F DIM ON 1m	1000 m 1.1 kg	  
200 12 420	TRACK 3F DIM ON 2m	2000 m 2.1 kg	  
200 12 430	TRACK 3F DIM ON 3m	3000 m 3.1 kg	  

Notes: