



COMPO S 93010

9 15711 9310 B


AVAILABLE IN

BLACK 9 15711 9310 B

CHROMED 9 15711 9310 C

DARK CHROMED 9 15711 9310 DC

WHITE 9 15711 9310 W

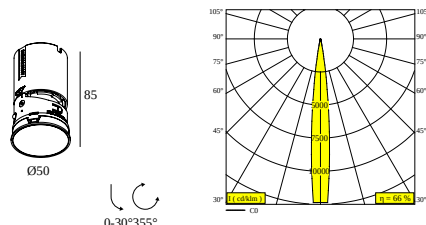

[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 90
RECESSED DEPTH (MM)	85
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.124
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	Accessories are not applicable with Super Spot except Honeycomb Single use B

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 4,7W / CRI>90 / 3000K / 371lm
SDMC	SDCM2
RISKGROUPE	RG1
BEAMANGLE	10°
LED TECHNICS (LIGHT SOURCE)	371lm // 4,7W // 80lm/W
LED TECHNICS (LUMINAIRE)	239lm // 5,4W // 44lm/W

Requirements

LED POWER SUPPLY 350 mA - DC

Accessories

COMPO S HONEYCOMB SINGLE USE B

COMPO S LINEAR SPREAD LENS

COMPO S SPREAD LENS

COMPO S SOFTENING LENS

COMPO S GLASS SBL

For detailed installation instructions, please consult the manual : [9_15711_XXX0_HAND.pdf](#)

COMPO S 93010

9 15711 9310 B

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required

FINISH YOUR SPECIFICATION

LED Power supply	# of Fixtures
 web2print_power_supply_info_box	Min current Max current
15710 3100 LED POWER SUPPLY 18W NO DIM 1400mA	1->4 ☐
15710 3300 LED POWER SUPPLY MULTIPOWER 15W NO DIM 350mA	1->2 ☐
15710 3800 LED POWER SUPPLY MULTIPOWER 10W DIM8 350mA	1 ☐
15710 4500 LED POWER SUPPLY MULTIPOWER 12W DIM1 350mA	1 ☐
15710 5000 LED POWER SUPPLY MULTIPOWER 55W DALI DT6 1400mA	1->13 ☐
Dimtype: DALI	
15710 5300 LED POWER SUPPLY MULTIPOWER 12W DALI DT6 350mA	1 ☐
Dimtype: DALI	

Mounting kits

	15710 0010 B MOUNTING KIT COMPO S TRIM B	☐
	Cutout dimension (mm): 55	
	15710 0010 W MOUNTING KIT COMPO S TRIM W	☐

COMPO S 93010

9 15711 9310 B



15710 0040 MOUNTING KIT COMPO S TRIMLESS

☐

Cutout dimension (mm): 55

Light altering devices

15710 0100 B COMPO S HONEYCOMB SINGLE USE B

☐

15710 0110 COMPO S LINEAR SPREAD LENS

☐

Cutout dimension (mm): 26,5

15710 0120 COMPO S SPREAD LENS

☐

Cutout dimension (mm): 26,5

15710 0130 COMPO S SOFTENING LENS

☐

Cutout dimension (mm): 26,5

15710 0140 COMPO S GLASS SBL

☐

Cutout dimension (mm): 26,5

Notes: