

SPY FOCUS



With Spy Focus one can opt for different beam angles out of only 1 luminaire, as the circle of light can be widened or narrowed by rotating the front of the fittings' body - completely tool & hardware free.

Specification	Spy Focus Clip	Spy Focus On
LED Aperture	2 1/4"	
Ceiling Cut-out:	2"	N/A
Installation Method:	Semi-Recessed	1/2" EMT or 4" J-Box
Adjustability:	Adjustable 0-90° / 355°	
Rating:	IP20	

Performance	
LED Maintenance:	L70>50,000h
McAdam Step:	1
CRI:	90
*LP:	6.1W
*MP:	9W
*HP:	11.6W
*XP:	17.2W

Delivered Lumens	2700K		3000K		3500K	
**Optic (Field Adjusted):	8-43°	12-45°	8-43°	12-45°	8-43°	12-45°
Spy Focus LP:	315Lm		318Lm		325Lm	
Spy Focus MP:	437Lm		441Lm		452Lm	
Spy Focus HP:		510Lm		533Lm		552Lm
Spy Focus XP:		703Lm		735Lm		762Lm

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: SPY62-HPFC35A-FG-B-CLFL-RMTD1-UNV

Luminaire	Size	Power*	Optic**	CCT	Function	Finish	Style	Installation	Application	Controls***
SPY SPY	62 62mm / 2 1/16" Diameter	LP Low Power MP Medium Power HP ¹ High Power XP Maximum Power	FC FOCUS Field Adjusted	27 2700K 30 3000K 35 3500K	A Adjustable	B-B Black-Black FBR-B Flemish Bronze-Black FG-B Flemish Gold-Black W-B ² White-Black W-W White-White	CL Clip semi- recessed ON Surface canopy	FL Flush kit for mud into drywall RS Surface trim for rigid surface MK Mud kit into drywall over 4" junction box PRB Black coverplate for 4" junction box PRW White coverplate for 4" junction box	IAT_RMT New Construction-IC AIRTIGHT + Remote Power Supply RMT Remote Power Supply RMT Remote Power Supply	D1-UNV 0-10V dim 120- 277V D8-120 ¹ FE ELV dim 120V

¹ Only available with Style CL

² Not available with Power HP

*** Contact factory for additional dimming options.

Related Products

Spy 27, Spy 39, Spy 52, Spy 66, Spy 90, Spy C (pendant), M-Spy 27/39, M-Spy 52/66/Focus

DELTALIGHT

www.deltalight.com



Finish Options

SPY FOCUS 62 CLIP




SPY FOCUS 62 ON



Photometric Data

SPY FOCUS 62 SP

SPY FOCUS 62 XP

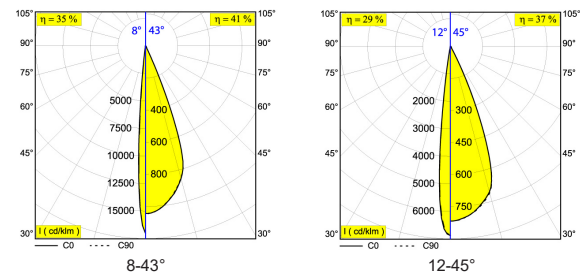




Installation Options

IC AIRTIGHT

S-SMALL:
A: 12"-5/8" x **B:** 11"-1/16" x **C:** 4"-13/16"
A: 323mm x **B:** 281mm x **C:** 122mm




- Low Profile under 5" Height
- New Construction Airtight
- For use in insulated ceiling
- Chicago Plenum
- ETL Listed
- Hangerbar expand to 24"-23/32 or 15"-3/32 - reduce to 12"-23/32 or 9"- 1/32
- Damp rated
- Patented System for easy driver servicing from room side


FL - FLUSH MOUNTING KIT

MK - MUD KIT 1

PRB/PRW - COVERPLATE R 118

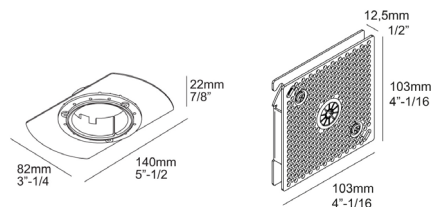


Requires 4" junction box



Requires 4" junction box
(Black or White)

REMOTE DRIVER (With Controls D8)


A: 8" x **B:** 2"-1/2" x **C:** 2"-1/2"
A: 203mm x **B:** 64mm x **C:** 64mm



- For Remote application
- ETL Listed
- Damp rated

REMOTE DRIVER (With Controls D1)

A: 8" x **B:** 2"-3/16" x **C:** 4"-1/4"
A: 203mm x **B:** 72mm x **C:** 108mm



- For Remote application
- ETL Listed
- Damp rated

Driver Options

D1

- Dimming Control 0-10V
- Dimming Range 1-100%
- Dim to off yes at 0.7mA
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥87
- THD @ Full Load <20%
- Title 24 Compliant

Dimmer Compatibility

- Leviton IP710-DLZ
- Lutron DDTV-XX
- WattStopper ADF-120277
- Synergy Lighting Controls ISD BC

D8 (With Power XP)

- Dimming Control Phase Control
- Dimming Range 20-100%
- Dim to off yes
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥80
- THD @ Full Load <10%

Dimmer Compatibility

- Leviton IPE04-1LZ
- Lutron DVELV-300P

D8

- Dimming Control Phase Control
- Dimming Range 10-100%
- Dim to off no
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥78
- THD @ Full Load <12%

Dimmer Compatibility

- Leviton IPE04-1LZ
- Lutron DVELV-300P

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.