




LUNELLE 52 SPM20 93030 MDL

32820 9320 BRA

- AVAILABLE IN
- BRUSHED ALU 32820 9320 BRA
 - BRUSHED ALU-BLACK 32820 9320 BRA-B
 - BRUSHED ALU-WHITE 32820 9320 BRA-W
 - BRUSHED ANTHRACITE 32820 9320 BRAT
 - BRUSHED ANTHRACITE-BLACK 32820 9320 BRAT-B
 - BRUSHED ANTHRACITE-WHITE 32820 9320 BRAT-W
 - BRUSHED BROWN BRONZE 32820 9320 BRBB
 - BRUSHED BROWN BRONZE BLACK 32820 9320 BRBB-B
 - BRUSHED BROWN BRONZE WHITE 32820 9320 BRBB-W
 - BRUSHED COPPER 32820 9320 BRCU
 - BRUSHED COPPER-BLACK 32820 9320 BRCU-B
 - BRUSHED COPPER-WHITE 32820 9320 BRCU-W
 - BRUSHED GOLD 32820 9320 BRG
 - BRUSHED GOLD-BLACK 32820 9320 BRG-B
 - BRUSHED GOLD-WHITE 32820 9320 BRG-W
 - BRUSHED OLD BRONZE 32820 9320 BROB
 - BRUSHED OLD BRONZE-BLACK 32820 9320 BROB-B
 - BRUSHED OLD BRONZE-WHITE 32820 9320 BROB-W

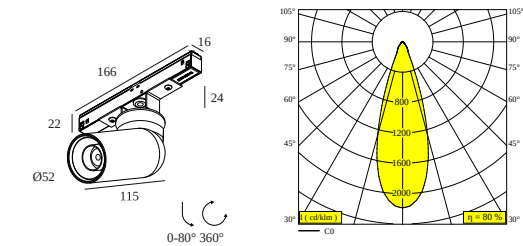

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	F
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED 5,6W / CRI>90 / 3000K / 519lm
SDCM	SDCM3
RISKGROUP	RG2
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	519lm // 5,6W // 92lm/W
LED TECHNICS (LUMINAIRE)	415lm // 6,4W // 64lm/W

Requirements
LED POWER SUPPLY 48V-DC

Options
DIMMABLE MODULATOR


Accessories
VISOR 52

For detailed installation instructions, please consult the manual : [32820_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices

14



32810 0010 DC

VISOR 52 DC

☐

Notes: