

BOWIE



Add some body to the room with Bowie, it impresses through its spherical shape. Twist and turn, tilt and aim, Bowie will always look the same, whatever its direction and no matter the angle you look at it. Bowie in pure white or black easily fits in any interior and adds a touch of richness to the room.

Specification	
LED Aperture	1 1/16"
Ceiling Cutout:	2"
Adjustability:	Adjustable 0-90° / 355°
Rating:	IP20

Performance	
LED Maintenance:	L70>50,000h
McAdam Step:	1
CRI:	90
*MP:	6.1W
*HP:	9W

Delivered Lumens	2700K	3000K	3500K
Optic:	25°/37°	25°/37°	25°/37°
BOWIE MP:	Up to 612Lm	Up to 584Lm	Up to 606Lm
BOWIE HP:	Up to 850Lm	Up to 858Lm	Up to 878Lm

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: BWE-HP3730A-W-W-CLRS-IATD8-120

Luminaire	Power*	Optic	CCT	Function	Finish	Style	Installation	Application	Controls***
BWE BOWIE	MP Medium Power	25 25°	27 2700K	A Adjustable	B-B Black-Black	CL Clip semi- recessed	FL Flush kit for mud into drywall	IAT ⁽¹⁾ New Construction IC AIRTIGHT IAT_RMT New Construction IC AIRTIGHT + Remote Power Supply RMT Remote Power Supply	D1-UNV 0-10V dim 120-277V D8-120 FE ELV dim 120V
	HP High Power	37 37°	30 3000K		W-W White-White		RS Surface trim for rigid surface		
			35 3500K						

¹ Only available with Power HP.

*** Contact factory for additional dimming options.

Related Products

Bowie M, Odron, Pion




Finish Options

BOWIE




FL - FLUSH MOUNT



Photometric Data

BOWIE

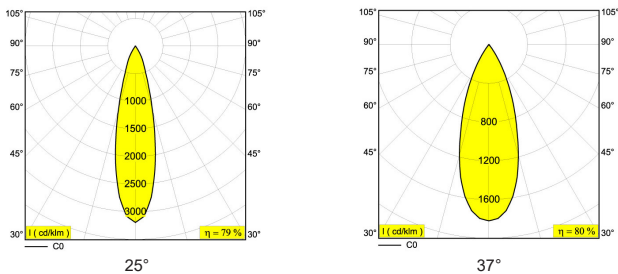




Installation Options

IC AIRTIGHT

S-SMALL:


A: 12"-5/8 x B: 11"-1/16 x C: 4"-13/16
A: 323mm x B: 281mm x C: 122mm



- Low Profile under 5" Height
- New Construction Airtight
- For use in insulated ceiling
- Chicago Plenum
- ETL Listed
- Hangerbar expand to 24"-23/32 or 15"-3/32 - reduce to 12"-23/32 or 9"- 1/32
- Damp rated
- Patented System for easy driver servicing from room side

Remote Driver (With Controls D8)


A: 8" x B: 2"-1/2 x C: 2"-1/2
A: 203mm x B: 64mm x C: 64mm



- For Remote application
- ETL Listed
- Damp rated

Remote Driver (With Controls D1-UNI)

A: 8" x B: 2"-3/16 x C: 4"-1/4
A: 203mm x B: 72mm x C: 108mm



- For Remote application
- ETL Listed
- Damp rated

Driver Options

D1

- Dimming Control 0-10V
- Dimming Range 1-100%
- Dim to off yes at 0.7mA
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥87
- THD @ Full Load <20%
- Title 24 Compliant

Dimmer Compatibility

- Leviton IP710-DLZ
- Lutron DDTV-XX
- WattStopper ADF-120277
- Synergy Lighting Controls ISD BC

D8 (With Housing IAT_RMT or RMT - 2 Fixtures)

- Dimming Control Phase Control
- Dimming Range 20-100%
- Dim to off yes
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥80
- THD @ Full Load <10%

Dimmer Compatibility

- Leviton IPE04-1LZ
- Lutron DVELV-300P

D8

- Dimming Control Phase Control
- Dimming Range 10-100%
- Dim to off no
- Power Factor @ Full Load >0.9
- Efficiency @ Full Load ≥78
- THD @ Full Load <12%

Dimmer Compatibility

- Leviton IPE04-1LZ
- Lutron DVELV-300P

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.