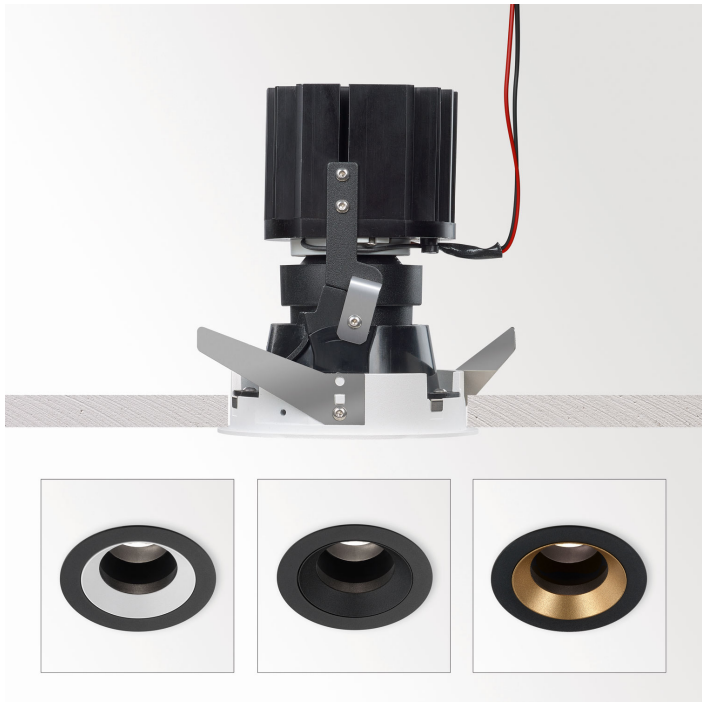
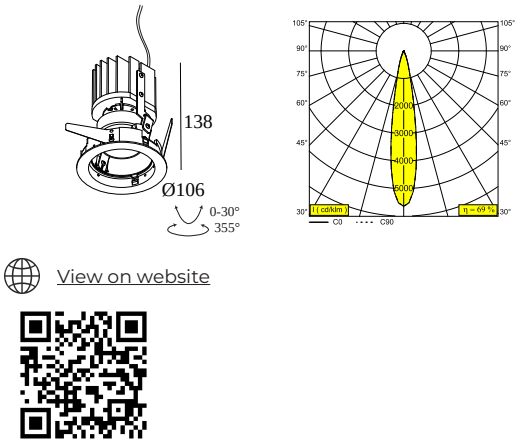




iMAX II ROUND ADJUSTABLE MP  
93018

24211 9310 B

AVAILABLE IN  
**BLACK** 24211 9310 B  
**WHITE** 24211 9310 W



[View on website](#)



| General info                       |                                                   |
|------------------------------------|---------------------------------------------------|
| LOCATION                           | indoor                                            |
| INSTALLATION                       | Ceiling Recessed                                  |
| CUTOUT SHAPE/SIZE (MM)             | round - 98                                        |
| RECESSED DEPTH (MM)                | 155                                               |
| THICKNESS OF MOUNTING SURFACE (MM) | max.25                                            |
| INGRESS PROTECTION                 | IP20 or IP54 (with TUBE IP)                       |
| WEIGHT (KG)                        | 0.5                                               |
| ADJUSTABILITY                      | 0° to 30° swiveling, 355° rotatable               |
| INFORMATION                        | LENS SP-18°<br>EXCL.LED POWER SUPPLY 350-500mA-DC |

| Electrical info |                           |
|-----------------|---------------------------|
| CLASS           | III                       |
| DIM TYPE        | depending on power supply |
| ENERGY CLASS    | E                         |
| CERTIFICATES    | CB, EAC, ENEC             |

| Lightsource info            |                                                              |
|-----------------------------|--------------------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                                          |
| LIGHTSOURCE                 | LED array 11,6-17,2W / CRI>90 (R9: 52) / 3000K / 1524-2101lm |
| TM-30 VALUES                | rf: 90 / Rg: 99                                              |
| SDCM                        | SDCM1                                                        |
| RISKGROUP                   | RG1                                                          |
| LM80                        | L90B10 > 50000                                               |
| BEAMANGLE                   | 18°                                                          |
| LED TECHNICS (LIGHT SOURCE) | 2101lm // 17,2W // 123lm/W                                   |
| LED TECHNICS (LUMINAIRE)    | 1450lm // 19,8W // 73lm/W                                    |

| Requirements                        |  |
|-------------------------------------|--|
| iMAX II TUBE ROUND                  |  |
| LED POWER SUPPLY 350 / 500mA-DC DIM |  |

| Accessories         |  |
|---------------------|--|
| iMAX II ACCESSOIRES |  |

For detailed installation instructions, please consult the manual : [24211\\_XXXX\\_HAND.pdf](#)

# DELTALIGHT

## iMAX II ROUND ADJUSTABLE MP 93018


24211 9310 B

### CEILING COMPATIBILITY



| Ceiling Type                                                                                       | Mounting Kit                                                                                                                    |          |
|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|----------|
|  System ceiling    |  15215 0010 - MOUNTING KIT FLUSH iMAX II ROUND | Required |
|  Plasterboard      |  15215 0010 - MOUNTING KIT FLUSH iMAX II ROUND | Required |
|  Stucanet          |  15215 0010 - MOUNTING KIT FLUSH iMAX II ROUND | Required |
|  Wood              | -                                                                                                                               |          |
|  Stretched ceiling | -                                                                                                                               |          |

### FINISH YOUR SPECIFICATION

#### Emergency units











|                                                                                    |                                                                     |                          |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------|--------------------------|
|  | <b>21032 0270 B</b> EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B | <input type="checkbox"/> |
|                                                                                    | <b>21032 0270 W</b> EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W | <input type="checkbox"/> |

#### LED power supplies

|                                                                                                                                                                                                                                                                                                                                           |                                                                                                                         | # of Fixtures              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|----------------------------|
|  # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the 'I' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V. |                                                                                                                         | Min current   Max current  |
|                                                                                                                                                                                                                                                         | <b>300 48 350 ED1</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1<br>Dimtype: 1-10V<br>Cutout dimension (mm): 30 | 1 <input type="checkbox"/> |
|                                                                                                                                                                                                                                                         | <b>300 48 350 ED5</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5<br>Dimtype: DALI<br>Cutout dimension (mm): 45  | 1 <input type="checkbox"/> |











iMAX II ROUND ADJUSTABLE MP 93018

24211 9310 B

|                                                                                    |                                                                          |             |                          |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-------------|--------------------------|
|    | <b>300 48 350 MDL</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL  | 1           | <input type="checkbox"/> |
|                                                                                    | Dimtype: non-dimmable                                                    |             |                          |
|                                                                                    | Cutout dimension (mm): 30                                                |             |                          |
|    | <b>300 48 350 WDL</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL  | 1           | <input type="checkbox"/> |
|                                                                                    | Dimtype: WDL = wireless dimmable                                         |             |                          |
|                                                                                    | Cutout dimension (mm): 45                                                |             |                          |
|    | <b>300 48 500 ED1</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1 | 1           | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V                                                           |             |                          |
|                                                                                    | Cutout dimension (mm): 30                                                |             |                          |
|    | <b>300 48 500 ED5</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 | 1           | <input type="checkbox"/> |
|                                                                                    | Dimtype: DALI                                                            |             |                          |
|                                                                                    | Cutout dimension (mm): 45                                                |             |                          |
|  | <b>300 48 500 MDL</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL  | 1           | <input type="checkbox"/> |
|                                                                                    | Dimtype: non-dimmable                                                    |             |                          |
|                                                                                    | Cutout dimension (mm): 30                                                |             |                          |
|  | <b>300 48 500 WDL</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL  | 1           | <input type="checkbox"/> |
|                                                                                    | Dimtype: WDL = wireless dimmable                                         |             |                          |
|                                                                                    | Cutout dimension (mm): 45                                                |             |                          |
|  | <b>300 90 61</b> LED POWER SUPPLY MULTI-POWER DIM6                       | 1   1       | <input type="checkbox"/> |
|                                                                                    | Dimtype: mains (phase cut-off) or push button                            |             |                          |
|                                                                                    | Cutout dimension (mm): 56                                                |             |                          |
|  | <b>300 90 63</b> LED POWER SUPPLY MULTI-POWER DIM9                       | 2(2)   2(2) | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V or DALI or push button                                    |             |                          |
|                                                                                    | Cutout dimension (mm): 82                                                |             |                          |
|  | <b>300 90 64</b> LED POWER SUPPLY MULTI-POWER DIM7                       | 1(1)   1(0) | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V or push button                                            |             |                          |
|                                                                                    | Cutout dimension (mm): 72                                                |             |                          |
|  | <b>300 90 67</b> LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9    | 1   -       | <input type="checkbox"/> |
|                                                                                    | Dimtype: 1-10V or DALI or push button                                    |             |                          |








iMAX II ROUND ADJUSTABLE MP 93018

24211 9310 B

|                                                                                    |                                                                                                                                        |             |                          |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-------------|--------------------------|
|    | <b>300 90 68</b><br>LED POWER SUPPLY MULTI-POWER DIM5<br><br>Dimtype: DALI<br><br>Cutout dimension (mm): 72                            | 1(1)   1(0) | <input type="checkbox"/> |
|    | <b>300 90 69</b><br>LED POWER SUPPLY MULTI-POWER HV DIM9<br><br>Dimtype: 1-10V or DALI or push button<br><br>Cutout dimension (mm): 84 | 3(3)   3(2) | <input type="checkbox"/> |
|    | <b>300 90 124</b><br>LED POWER SUPPLY MULTI-POWER DIM7<br><br>Dimtype: 1-10V or push button<br><br>Cutout dimension (mm): 55           | 1(1)   1(0) | <input type="checkbox"/> |
|    | <b>300 90 125</b><br>LED POWER SUPPLY MULTI-POWER MINI DIM5<br><br>Dimtype: DALI<br><br>Cutout dimension (mm): 55                      | 1(1)   1(0) | <input type="checkbox"/> |
|  | <b>300 90 135</b><br>LED POWER SUPPLY MULTI-POWER HV<br><br>Dimtype: non-dimmable<br><br>Cutout dimension (mm): 90                     | 2->2   2    | <input type="checkbox"/> |
|  | <b>21012 0010</b><br>LED POWER SUPPLY MULTI POWER<br><br>Dimtype: non-dimmable<br><br>Cutout dimension (mm): 50                        | 1   1       | <input type="checkbox"/> |
|  | <b>21012 0021</b><br>LED POWER SUPPLY MULTI POWER DIM1<br><br>Dimtype: 1-10V<br><br>Cutout dimension (mm): 54                          | 1   1       | <input type="checkbox"/> |
|  | <b>21012 0035</b><br>LED POWER SUPPLY MULTI POWER DIM5<br><br>Dimtype: DALI<br><br>Cutout dimension (mm): 54                           | 1   1       | <input type="checkbox"/> |
|  | <b>21012 004W</b><br>LED POWER SUPPLY MULTI-POWER WDL<br><br>Dimtype: WDL = wireless dimmable<br><br>Cutout dimension (mm): 84         | 2(2)   2(2) | <input type="checkbox"/> |
|  | <b>21012 005W</b><br>LED POWER SUPPLY MULTI-POWER COMPACT WDL<br><br>Dimtype: WDL = wireless dimmable<br><br>Cutout dimension (mm): 54 | 1   1       | <input type="checkbox"/> |

iMAX II ROUND ADJUSTABLE MP 93018

24211 9310 B

|                                                                                    |                                                                      |       |                          |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------|-------|--------------------------|
|    | <b>21012 0268</b> LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8    | 1     | <input type="checkbox"/> |
|                                                                                    | Dimtype: mains (phase cut-off)                                       |       |                          |
|                                                                                    | Cutout dimension (mm): 50                                            |       |                          |
|    | <b>21012 0288</b> LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8    | 1     | <input type="checkbox"/> |
|                                                                                    | Dimtype: mains (phase cut-off)                                       |       |                          |
|                                                                                    | Cutout dimension (mm): 55                                            |       |                          |
|    | <b>21012 0298</b> LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8    | 1   1 | <input type="checkbox"/> |
|                                                                                    | Dimtype: mains (phase cut-off)                                       |       |                          |
|                                                                                    | Cutout dimension (mm): 48                                            |       |                          |
|    | <b>21012 0480</b> LED POWER SUPPLY 350mA-DC / 17W IP68               | 1(1)  | <input type="checkbox"/> |
|                                                                                    | Dimtype: non-dimmable                                                |       |                          |
|                                                                                    | Cutout dimension (mm): 60                                            |       |                          |
|  | <b>21012 0500</b> LED POWER SUPPLY 500mA-DC / 24W IP68               | 1(0)  | <input type="checkbox"/> |
|                                                                                    | Dimtype: non-dimmable                                                |       |                          |
|                                                                                    | Cutout dimension (mm): 60                                            |       |                          |
|  | <b>21032 0295</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 | 1     | <input type="checkbox"/> |
|                                                                                    | Dimtype: DALI                                                        |       |                          |
|                                                                                    | Cutout dimension (mm): 30                                            |       |                          |
|  | <b>21032 0305</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 | 1     | <input type="checkbox"/> |
|                                                                                    | Dimtype: DALI                                                        |       |                          |
|                                                                                    | Cutout dimension (mm): 30                                            |       |                          |

Mounting kits


|                                                                                    |                                                    |  |                          |
|------------------------------------------------------------------------------------|----------------------------------------------------|--|--------------------------|
|  | <b>15215 0010</b> MOUNTING KIT FLUSH iMAX II ROUND |  | <input type="checkbox"/> |
|                                                                                    | Cutout dimension (mm): 121                         |  |                          |

# DELTALIGHT


## iMAX II ROUND ADJUSTABLE MP 93018

24211 9310 B


### Light altering devices



**24213 0050 B** iMAX II HONEYCOMB B

☐

**24213 0060** iMAX II GLASS SBL

☐

**24213 0070** iMAX II LINEAR SPREAD LENS

☐


**24213 0090** iMAX II SOFTENING LENS

☐

**24213 0100** iMAX II SPREAD LENS

☐

### Finish your product



**24213 0010 B** iMAX II TUBE ROUND B

☐


**24213 0010 FG** iMAX II TUBE ROUND FG

☐

**24213 0010 MMAT** iMAX II TUBE ROUND MMAT

☐

**24213 0010 W** iMAX II TUBE ROUND W

☐

**24213 0040 B** iMAX II TUBE ROUND IP B

☐

# DELTALIGHT

## iMAX II ROUND ADJUSTABLE MP 93018

24211 9310 B

|                               |                            |                          |
|-------------------------------|----------------------------|--------------------------|
| <b><u>24213 0040 FG</u></b>   | iMAX II TUBE ROUND IP FG   | <input type="checkbox"/> |
| <b><u>24213 0040 MMAT</u></b> | iMAX II TUBE ROUND IP MMAT | <input type="checkbox"/> |
| <b><u>24213 0040 W</u></b>    | iMAX II TUBE ROUND IP W    | <input type="checkbox"/> |

Notes: