




ENTERO RD-L TRIMLESS TW 96530

28437 9020 B

AVAILABLE IN
BLACK 28437 9020 B
FULL WHITE 28437 9020 FW
GOLD COLOURED 28437 9020 GC

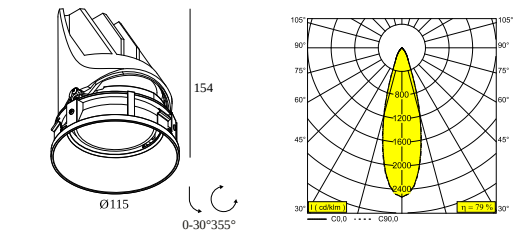

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	165
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.67
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-30° EXCLLED POWER SUPPLY 500mA-DC TW - (DALI DT8) Optional REFLECTORS 18° & 45° available

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 17,8W / CRI>90 (R9: 50) / 2700K-6500K / 2054lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	2054lm // 17,8W // 116lm/W
LED TECHNICS (LUMINAIRE)	1631lm // 20,5W // 80lm/W

Requirements	
MOUNTING KIT ENTERO ROUND L	
LED POWER SUPPLY 500mA-DC TW (Remote)	

Accessories	
ENTERO L HONEYCOMB	
ENTERO L LINEAR SPREAD LENS	
ENTERO L SPREAD LENS	
ENTERO L SOFTENING LENS	
ENTERO L GLASS SBL	

ENTERO RD-L TRIMLESS TW 96530

28437 9020 B

For detailed installation instructions, please consult the manual : [28437_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 28400 0030 - MOUNTING KIT ENTERO RD-L	Required
 Plasterboard	 28400 0030 - MOUNTING KIT ENTERO RD-L	Required
 Stucanet	 28400 0030 - MOUNTING KIT ENTERO RD-L	Required
 Concrete + plaster	 28400 0030 - MOUNTING KIT ENTERO RD-L	Required
 Lintel + plaster	 28400 0030 - MOUNTING KIT ENTERO RD-L	Required
 Hollow-core slab + plaster	 28400 0030 - MOUNTING KIT ENTERO RD-L	Required
 Stretched ceiling	 28400 0090 - MOUNTING KIT ENTERO RD-L CSC	Required
	 28400 0150 - MOUNTING KIT ENTERO RD-L WSC	Required

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



21012 0355 LED POWER SUPPLY 500mA-DC 2CH TW DIM5

Dimtype: DALI

Cutout dimension (mm): 85

1




DELTALIGHT

ENTERO RD-L TRIMLESS TW 96530

28437 9020 B

Mounting kits




159 159 224 118

28400 0030 MOUNTING KIT ENTERO RD-L

☐

Cutout dimension (mm): 162

Mounting kits stretched ceiling



200 200 118

28400 0090 MOUNTING KIT ENTERO RD-L CSC

☐



113 113 1121

28400 0150 MOUNTING KIT ENTERO RD-L WSC

☐


Light altering devices



113 113 1121

28500 0130 ENTERO L LINEAR SPREAD LENS


☐



113 113 1121

28500 0140 ENTERO L SPREAD LENS


☐



113 113 1121

28500 0150 ENTERO L SOFTENING LENS


☐



113 113 1121

28500 0160 ENTERO L GLASS SBL

☐




113 113 1121

28500 0170 B ENTERO L HONEYCOMB SINGLE USE B

☐

ENTERO RD-L TRIMLESS TW 96530

28437 9020 B



28500 0180 B ENTERO L HONEYCOMB DOUBLE USE B



Notes: