




## OML50 - INFORM DU HO 1640mm 8+8LED 93063 DIM5

31435 9335 B

BESCHIKBAAR IN  
**ZWART** 31435 9335 B

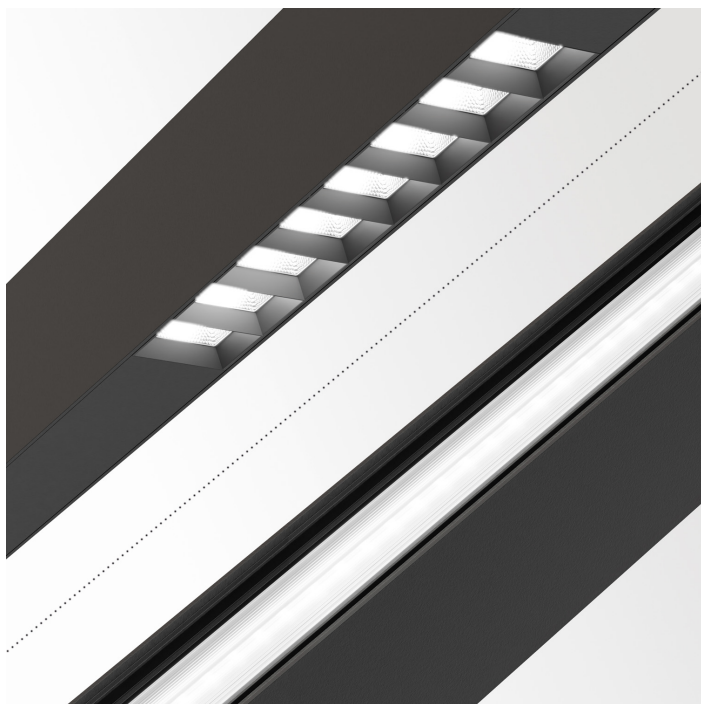

[Bekijk op website](#)



### Algemene info

|                               |                                                                                                                            |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <b>LOCATIE</b>                | binnen                                                                                                                     |
| <b>STOF EN WATERDICHTHEID</b> | IP20                                                                                                                       |
| <b>GEWICHT (KG)</b>           | 1.6                                                                                                                        |
| <b>INFO</b>                   | CLUSTER DOWN: 2131lm/m<br>CLUSTER UP: 2663lm/m<br>INCL.DIMMABLE LED POWER SUPPLY<br>(DALI-2 standard)<br>CABLING 1 CIRCUIT |

### Elektrische info

|                           |                      |
|---------------------------|----------------------|
| <b>ELEKTRISCH</b>         | 220-240V / 0 50-60Hz |
| <b>KLASSE</b>             | I                    |
| <b>VOEDING INBEGREPEN</b> | YES                  |
| <b>DIM TYPE</b>           | DALI                 |
| <b>ENERGIE KLASSE</b>     | E                    |
| <b>CERTIFICATES</b>       | EPD, RCM             |

### Info lichtbron

|                                 |                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------|
| <b>LIGHTSOURCE NAME</b>         | LED                                                                                                                    |
| <b>LICHTBRON</b>                | DOWN: LED cluster 24,2W / CRI>90 (R9: 50) / 3000K / 3494lm<br>UP: LED cluster 30,2W / CRI>90 (R9: 50) / 3000K / 4368lm |
| <b>TM-30 WAARDEN</b>            | Rf: 92 / Rg: 100                                                                                                       |
| <b>SMD</b>                      | SDCM3                                                                                                                  |
| <b>RISK-GROEP</b>               | RG1                                                                                                                    |
| <b>LM80</b>                     | L80 > 60000                                                                                                            |
| <b>BEAMANGLE</b>                | 63°                                                                                                                    |
| <b>LED TECHNIEK (LICHTBRON)</b> | DOWN: 3494lm // 24,2W // 145lm/W<br>UP: 4368lm // 30,2W // 145lm/W                                                     |

### Opties

WIRELESS CONTROL DIM5

Notes: