




LUNELLE 52 SPM20 92730 DIM5

32821 9225 BRA

- AVAILABLE IN
- BRUSHED ALU 32821 9225 BRA
 - BRUSHED ALU-BLACK 32821 9225 BRA-B
 - BRUSHED ALU-WHITE 32821 9225 BRA-W
 - BRUSHED ANTHRACITE 32821 9225 BRAT
 - BRUSHED ANTHRACITE-BLACK 32821 9225 BRAT-B
 - BRUSHED ANTHRACITE-WHITE 32821 9225 BRAT-W
 - BRUSHED BROWN BRONZE 32821 9225 BRBB
 - BRUSHED BROWN BRONZE BLACK 32821 9225 BRBB-B
 - BRUSHED BROWN BRONZE WHITE 32821 9225 BRBB-W
 - BRUSHED COPPER 32821 9225 BRCU
 - BRUSHED COPPER-BLACK 32821 9225 BRCU-B
 - BRUSHED COPPER-WHITE 32821 9225 BRCU-W
 - BRUSHED GOLD 32821 9225 BRG
 - BRUSHED GOLD-BLACK 32821 9225 BRG-B
 - BRUSHED GOLD-WHITE 32821 9225 BRG-W
 - BRUSHED OLD BRONZE 32821 9225 BROB
 - BRUSHED OLD BRONZE-BLACK 32821 9225 BROB-B
 - BRUSHED OLD BRONZE-WHITE 32821 9225 BROB-W

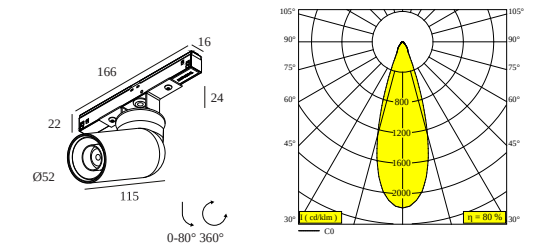

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	G
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED 5,6W / CRI>90 (R9: 80) / 2700K / 485lm
SDCM	SDCM3
RISKGROUP	RG2
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	485lm // 5,6W // 86lm/W
LED TECHNICS (LUMINAIRE)	388lm // 6,4W // 60lm/W
Requirements	
LED POWER SUPPLY 48V-DC	
Accessories	
VISOR 52	

For detailed installation instructions, please consult the manual : [32821_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices

027

14



32810 0010 DC

VISOR 52 DC

☐

Notes: