




FRAX MB 930 LINEAR H DIM5

26010 9345 FBRX

AVAILABLE IN
FLEMISH BRONZE OUTDOOR 26010 9345 FBRX
ANTHRACITE 26010 9345 N
PINE GREEN 26010 9345 PGR

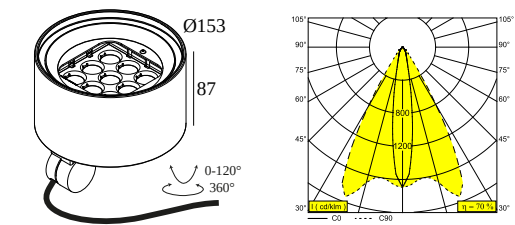

 [View on website](#)



General info	
LOCATION	outdoor
INSTALLATION	Floor Surface mounted,Wall Surface mounted
INGRESS PROTECTION	IP65
PROTECTION AGAINST MECHANICAL IMPACT	IK08
WEIGHT (KG)	2.1
ADJUSTABILITY	0° to 120° swiveling, 360° rotatable
INFORMATION	9 x LENS SP-14° INCL.DIMMABLE LED POWER SUPPLY 900mA-DC INCL.LINEAR SPREAD LENS HORIZONTAL Oval spread 15°-60° INCL.1 x CABLE H05 RN-F 5 x 1mm² 2m
Electrical info	
ELECTRICAL	110-277V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATES	EPD, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 23,4W / CRI>90 (R9: 60) / 3000K / 2654lm
TM-30 VALUES	Rf: 92 / Rg: 99
SDCM	SDCM3
RISKGROUP	RG2
LM80	L80 > 150000
BEAMANGLE	14°
LED TECHNICS (LIGHT SOURCE)	2654lm // 23,4W // 113lm/W
LED TECHNICS (LUMINAIRE)	1858lm // 26,9W // 69lm/W

Requirements

FRAX BRACKET
FRAX PIN
FRAX STRAP

Options

FRAX ANTI VANDAL SCREWS

Accessories

FRAX M KAP

FRAX MB 930 LINEAR H DIM5

26010 9345 FBRX

For detailed installation instructions, please consult the manual : [26010_XX45_HAND.pdf](#)

FINISH YOUR SPECIFICATION


Pins and plates for bollards

	26070 0040 FBRX FRAX PIN FBRX	☐
	26070 0040 N FRAX PIN N	☐
	26070 0040 PGR FRAX PIN PGR	☐

Fixation components

	26070 0060 FBRX FRAX BRACKET FBRX	☐
	26070 0060 N FRAX BRACKET N	☐
	26070 0060 PGR FRAX BRACKET PGR	☐

Light altering devices

	26070 0020 N FRAX M KAP N	☐
--	----------------------------------	--------------------------

DELTALIGHT

FRAX MB 930 LINEAR H DIM5

26010 9345 FBRX

Other



26070 0030 FRAX ANTI VANDAL SCREWS 5 PCS

☐

26070 0050 N FRAX STRAP N

☐

Notes: