




SL19 - SPY 20 L 92730 DIM5

27029 9225 FG

AVAILABLE IN
BLACK 27029 9225 B
FLEMISH BRONZE 27029 9225 FBR
FLEMISH GOLD 27029 9225 FG
GOLD COLOURED 27029 9225 GC
WHITE 27029 9225 W

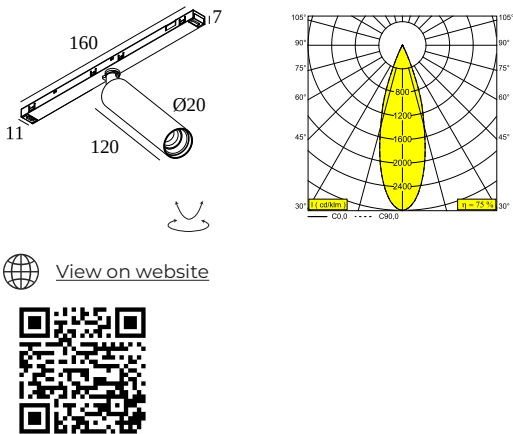

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.1
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-30° EXCLLED POWER SUPPLY 48V-DC SPY 20 TUBE B included
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, ENEC
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 2W / CRI>90 (R9: 55) / 2700K / 220lm
TM-30 VALUES	rf: 91 / Rg: 100
SDCM	SDCM3
RISKGROUP	RG2
LM80	L90B10 > 150000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	220lm // 2W // 110lm/W
LED TECHNICS (LUMINAIRE)	166lm // 2,3W // 72lm/W
Requirements	
LED POWER SUPPLY 48V-DC	

For detailed installation instructions, please consult the manual : [27029_XXX5_HAND.pdf](#)

SL19 - SPY 20 L 92730 DIM5

27029 9225 FG

FINISH YOUR SPECIFICATION

LED power supplies		# of Fixtures
# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
5510090 300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN Dimtype: non-dimmable	37	
63114125 300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN Dimtype: non-dimmable	90	
1729830 21012 0230 LED POWER SUPPLY 48V-DC / 100W Dimtype: non-dimmable Cutout dimension (mm): 40	37	
2239230 21012 0240 LED POWER SUPPLY 48V-DC / 200W Dimtype: non-dimmable Cutout dimension (mm): 40	75	

COMPATIBLE COMPOSABLES

SHIFTLINE 19 profile	Available Colours
1910 27011 0050 SL19 - PROFILE 2m	
1910 27011 0060 SL19 - PROFILE 3m	

Notes:

DELTALIGHT

SL19 - SPY 20 L 92730 DIM5

27029 9225 FG