



EXCLUSIVELY AVAILABLE IN INDIA

COMPO S 93020

9 15711 9320 B


AVAILABLE IN

NEGRO 9 15711 9320 B

CHROMO 9 15711 9320 C

CHROMO OSCURO 9 15711 9320 DC

BLANCO 9 15711 9320 W

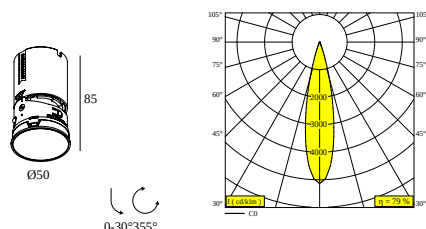

 [View on website](#)



General info	
LOCATION	interior
INSTALLATION	Techo Empotrado
CUTOUT SHAPE/SIZE (MM)	redondo - 90
RECESSED DEPTH (MM)	85
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.124
ADJUSTABILITY	0° to 30° giratorio, 355° orientable

Electrical info	
CLASS	III
DIM TYPE	dependiendo del tipo de fuente de alimentación externa
ENERGY CLASS	F

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6,4W / CRI>90 / 3000K / 495lm
SDCM	SDCM2
RISKGROUP	RG1
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	495lm // 6,4W // 120lm/W
LED TECHNICS (LUMINAIRE)	393lm // 7,4W // 53lm/W

Requirements

LED POWER SUPPLY 350 mA - DC

Accessories

COMPO S HONEYCOMB SINGLE USE B

COMPO S LINEAR SPREAD LENS

COMPO S SPREAD LENS

COMPO S SOFTENING LENS

COMPO S GLASS SBL

For detailed installation instructions, please consult the manual : [9_15711_XXX0_HAND.pdf](#)

DELTALIGHT

COMPO S 93020

9 15711 9320 B

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required

FINISH YOUR SPECIFICATION

Fuente de alimentación LED

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current

15710 3100	LED POWER SUPPLY 18W NO DIM 1400mA	1->4	
15710 3300	LED POWER SUPPLY MULTIPOWER 15W NO DIM 350mA	1->2	
15710 3800	LED POWER SUPPLY MULTIPOWER 10W DIM8 350mA	1	
15710 4500	LED POWER SUPPLY MULTIPOWER 12W DIM1 350mA	1	
15710 5000	LED POWER SUPPLY MULTIPOWER 55W DALI DT6 1400mA	1->13	
Dimtype: con DALI			
15710 5300	LED POWER SUPPLY MULTIPOWER 12W DALI DT6 350mA	1	
Dimtype: con DALI			

Mounting Kit



15710 0010 B MOUNTING KIT COMPO S TRIM B

Cutout dimension (mm): 55

15710 0010 W MOUNTING KIT COMPO S TRIM W

COMPO S 93020

9 15711 9320 B



15710 0040 MOUNTING KIT COMPO S TRIMLESS

☐

Cutout dimension (mm): 55

Dispositivos de modificación de Luz

15710 0100 B COMPO S HONEYCOMB SINGLE USE B

☐

15710 0110 COMPO S LINEAR SPREAD LENS

☐

Cutout dimension (mm): 26,5

15710 0120 COMPO S SPREAD LENS

☐

Cutout dimension (mm): 26,5

15710 0130 COMPO S SOFTENING LENS

☐

Cutout dimension (mm): 26,5

15710 0140 COMPO S GLASS SBL

☐

Cutout dimension (mm): 26,5

Notes: