




LUNELLE 52 SPM20 93030 DIM5

32821 9325 BRA

- AVAILABLE IN
- ALU BROSSÉ 32821 9325 BRA
 - ALU BROSSÉ-NOIR 32821 9325 BRA-B
 - ALU BROSSÉ-BLANC 32821 9325 BRA-W
 - ANTHRACITE BROSSÉ 32821 9325 BRAT
 - ANTHRACITE BROSSÉ-NOIR 32821 9325 BRAT-B
 - ANTHRACITE BROSSÉ-BLANC 32821 9325 BRAT-W
 - BRONZE BRUN BROSSÉ 32821 9325 BRBB
 - BRONZE BRUN BROSSÉ NOIR 32821 9325 BRBB-B
 - BRONZE BRUN BROSSÉ BLANC 32821 9325 BRBB-W
 - CUIVRE BROSSÉ 32821 9325 BRCU
 - CUIVRE BROSSÉ-NOIR 32821 9325 BRCU-B
 - CUIVRE BROSSÉ-BLANC 32821 9325 BRCU-W
 - OR BROSSÉ 32821 9325 BRG
 - OR BROSSÉ-NOIR 32821 9325 BRG-B
 - OR BROSSÉ-BLANC 32821 9325 BRG-W
 - BRONZE VIEUX BROSSÉ 32821 9325 BROB
 - BRONZE VIEUX BROSSÉ-NOIR 32821 9325 BROB-B

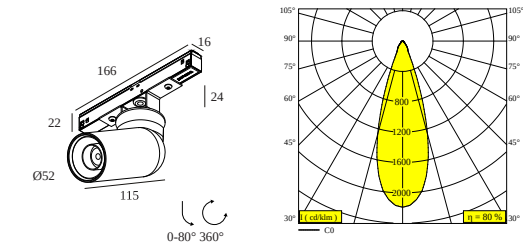

[View on website](#)



General info	
LOCATION	interieur
INSTALLATION	Plafond Monté sur systèmes basse tension
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	F
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED 5,6W / CRI>90 / 3000K / 519lm
SDMC	SDCM3
RISKGROUP	RG2
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	519lm // 5,6W // 92lm/W
LED TECHNICS (LUMINAIRE)	415lm // 6,4W // 64lm/W
Requirements	
LED POWER SUPPLY 48V-DC	
Accessories	
VISOR 52	

For detailed installation instructions, please consult the manual : [32821_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION

modifier les dispositifs de lumière

027

14



32810 0010 DC

VISOR 52 DC

☐

Notes: