




LUNELLE 52 SPM20 93030 DIM5

32821 9325 BRA

- AVAILABLE IN
- ALU GEBÜRSTET 32821 9325 BRA
 - ALU GEBÜRSTET-SCHWARZ 32821 9325 BRA-B
 - ALU GEBÜRSTET-WEISS 32821 9325 BRA-W
 - GEBÜRSTETES ANTHRAZIT 32821 9325 BRAT
 - GEBÜRSTETES ANTHRAZIT-SCHWARZ 32821 9325 BRAT-B
 - GEBÜRSTETES ANTHRAZIT-WEISS 32821 9325 BRAT-W
 - GEBÜRSTETE BRAUNE BRONZE 32821 9325 BRBB
 - GEBÜRSTETE BRAUNE BRONZE SCHWARZ 32821 9325 BRBB-B
 - GEBÜRSTETE BRAUNE BRONZE WEISS 32821 9325 BRBB-W
 - GEBÜRSTETES KUPFER 32821 9325 BRCU
 - GEBÜRSTETES KUPFER-SCHWARZ 32821 9325 BRCU-B
 - GEBÜRSTETES KUPFER-WEISS 32821 9325 BRCU-W
 - GEBÜRSTETES GOLD 32821 9325 BRG
 - GEBÜRSTETES GOLD-SCHWARZ 32821 9325 BRG-B
 - GEBÜRSTETES GOLD-WEISS 32821 9325 BRG-W
 - GEBÜRSTETE ALTE BRONZE 32821 9325 BROB
 - GEBÜRSTETE ALTE BRONZE-SCHWARZ 32821 9325 BROB-B

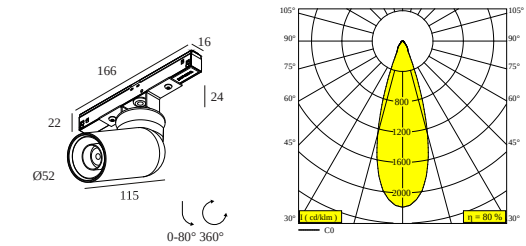

[View on website](#)




General info	
LOCATION	innenbereich
INSTALLATION	Decke Niederspannungssysteme montiert
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	F
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED 5,6W / CRI>90 / 3000K / 519lm
SDCM	SDCM3
RISKGROUP	RG2
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	519lm // 5,6W // 92lm/W
LED TECHNICS (LUMINAIRE)	415lm // 6,4W // 64lm/W
Requirements	
LED POWER SUPPLY 48V-DC	
Accessories	
VISOR 52	

For detailed installation instructions, please consult the manual : [32821_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Licht veredelndes Zubehör



32810 0010 DC VISOR 52 DC



Notes: