




SUPERLOOP-HEDRA 92733 MDL

418 368 811 922 MDL GC

AVAILABLE IN
BLACK BRONZE 418 368 811 922 MDL BBR
GOLD COLOURED 418 368 811 922 MDL GC

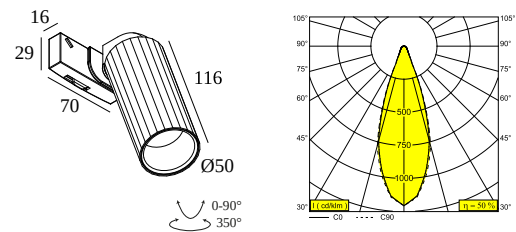

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 90° swiveling, 350° rotatable
INFORMATION	REFLECTOR FL-33° INCL.CLIP 48V ADAPTER EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	D
CERTIFICATES	CB, EAC, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8W / CRI>90 (R9: 60) / 2700K / 753lm
TM-30 VALUES	Rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	33°
LED TECHNICS (LIGHT SOURCE)	753lm // 5,8W // 129lm/W
LED TECHNICS (LUMINAIRE)	378lm // 6,7W // 57lm/W

Requirements	
VIZIR TUBE	
LED POWER SUPPLY 48V-DC	

Options	
DIMMABLE MODULATOR	

Accessories	
VIZIR HONEYCOMB	
VIZIR SOFTENING LENS	

For detailed installation instructions, please consult the manual : [418_368_811_XXX_MDL_HAND.pdf](#)

FINISH YOUR SPECIFICATION


SMART 48

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



300 90 011 SMART 48 MODULATOR DIM9

23

Dimtype: 1-10V or DALI or push button



300 90 012 SMART 48 MODULATOR WD

23

Dimtype: WDL = wireless dimmable


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 89 48 90 LED POWER SUPPLY 48V-DC / 90W

11

Dimtype: non-dimmable


Cutout dimension (mm): 75



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

12

Dimtype: non-dimmable



300 89 48 150 LED POWER SUPPLY 48V-DC / 150W

18

Dimtype: non-dimmable



DELTALIGHT

SUPERLOOP-HEDRA 92733 MDL

418 368 811 922 MDL GC

	300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	29	☐
Dimtype: non-dimmable			
	21012 0230 LED POWER SUPPLY 48V-DC / 100W	12	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 40			
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	24	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 40			

Light altering devices

	473 03 01 B VIZIR HONEYCOMB B	☐
	473 03 04 VIZIR SOFTENING LENS	☐

Finish your product










	473 01 00 B VIZIR TUBE B	☐
	473 01 00 FBR VIZIR TUBE FBR	☐
	473 01 00 FG VIZIR TUBE FG	☐
	473 01 00 W VIZIR TUBE W	☐

DELTALIGHT

SUPERLOOP-HEDRA 92733 MDL

418 368 811 922 MDL GC


COMPATIBLE COMPOSABLES

SUPERLOOP HC MDL	Available Colours
 418 481 07 SUPERLOOP HC 70 MDL	
 418 481 09 SUPERLOOP HC 90 MDL	
 418 481 12 SUPERLOOP HC 120 MDL	
 418 481 17 SUPERLOOP HC 170 MDL	
SUPERLOOP HC MDL XL	Available Colours
 20555 0000 SUPERLOOP HC 200 MDL	
 20556 0000 SUPERLOOP HC 250 MDL	
 20557 0000 SUPERLOOP HC 300 MDL	
 20558 0000 SUPERLOOP HC 350 MDL	
 20559 0000 SUPERLOOP HC 400 MDL	

DELTALIGHT

SUPERLOOP-HEDRA 92733 MDL

418 368 811 922 MDL GC




20560 0000 SUPERLOOP HC 500 MDL




SUPERLOOP PLUS MDL

Available Colours




20564 0000 SUPERLOOP PLUS HC 70 MDL





20565 0000 SUPERLOOP PLUS HC 90 MDL






20566 0000 SUPERLOOP PLUS HC 120 MDL




SUPERLOOP S HC MDL

Available Colours




418 482 106 SUPERLOOP S HC 106 MDL






418 482 109 SUPERLOOP S HC 109 MDL





418 482 211 SUPERLOOP S HC 211 MDL





418 482 217 SUPERLOOP S HC 217 MDL



Notes: