




ENTERO RD-M TRIMLESS IP TW 96518

28455 9010 GC

AVAILABLE IN
BLACK 28455 9010 B
FULL WHITE 28455 9010 FW
GOLD COLOURED 28455 9010 GC

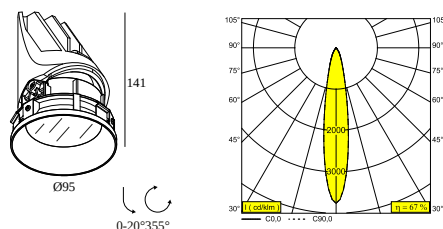

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	150
INGRESS PROTECTION	IP44/20
WEIGHT (KG)	0.415
ADJUSTABILITY	0° to 20° swiveling, 355° rotatable
INFORMATION	REFLECTOR SP-18° EXCL.LED POWER SUPPLY 500mA-DC TW - (DALI DT8)
Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 9W / CRI>90 (R9: 50) / 2700K-6500K / 1087lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	18°
LED TECHNICS (LIGHT SOURCE)	1087lm // 9W // 121lm/W
LED TECHNICS (LUMINAIRE)	725lm // 10,4W // 70lm/W

Requirements

MOUNTING KIT ENTERO ROUND M
LED POWER SUPPLY 500mA-DC TW (Remote)

For detailed installation instructions, please consult the manual : [28455_XXX0_HAND.pdf](#)

DELTALIGHT

ENTERO RD-M TRIMLESS IP TW 96518

28455 9010 GC

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 28400 0020 - MOUNTING KIT ENTERO RD-M O.F.A.	Required
 Plasterboard	 28400 0020 - MOUNTING KIT ENTERO RD-M O.F.A.	Required
 Stucanet	 28400 0020 - MOUNTING KIT ENTERO RD-M O.F.A.	Required
 Concrete + plaster	 28400 0020 - MOUNTING KIT ENTERO RD-M O.F.A.	Required
 Lintel + plaster	 28400 0020 - MOUNTING KIT ENTERO RD-M O.F.A.	Required
 Hollow-core slab + plaster	 28400 0020 - MOUNTING KIT ENTERO RD-M O.F.A.	Required
 Stretched ceiling	 28400 0080 - MOUNTING KIT ENTERO RD-M CSC	Required
	 28400 0140 - MOUNTING KIT ENTERO RD-M WSC	Required

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




21012 0355 LED POWER SUPPLY 500mA-DC 2CH TW DIM5

2

Dimtype: DALI

Cutout dimension (mm): 85

Mounting kits



28400 0020 MOUNTING KIT ENTERO RD-M O.F.A.


Cutout dimension (mm): 127

DELTALIGHT

ENTERO RD-M TRIMLESS IP TW 96518

28455 9010 GC

Mounting kits stretched ceiling



28400 0080 MOUNTING KIT ENTERO RD-M CSC

☐

28400 0140 MOUNTING KIT ENTERO RD-M WSC

☐

Notes: