

SPY 90 ON



Spy 90 is the surface mounted Spy solution for high output and ultimate performance, as it has an integrated dimmable driver inside. In line with the complete Spy range, the tubular design can be finished with the coloured insert of your choice, but Spy 90 especially wows you with its output up to 2370 lumens and its choice of 3 different beam angles.

Specification	
LED Aperture	3 ⁷ / ₁₆ "
Installation Method:	1/2" EMT or 4" J-Box
Adjustability:	Adjustable 0-90° / 355°
Rating:	IP20

Performance	
CRI / TM-30 (3000K):	90 / Rf: 90 / Rg: 99
McAdam Step:	1
LED Maintenance:	L90B10>50,000h
*Standard Power:	26.7W

Delivered Lumens	2700K			3000K			3500K		
**Optic:	NS	MD	WS	NS	MD	WS	NS	MD	WS
Spy 90 On:	2187	2174	2144	2287	2273	2241	2370	2356	2322

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: SPY90-A30NSSP-W-B-ONPRWINCD1-UNV

Luminaire	Size	Function	CCT	Optic**	Power*	Finish	Inner Finish	Type	Installation	Application	Controls**
SPY SPY	90 90mm / 3 ⁷ / ₁₆ " Diameter	A Adjustable	27 2700K 30 3000K 35 3500K	NS Narrow Spot 18° MD Medium Spot 30° WS Medium Wide Spot 45°	SP Standard Power	B Black W White	B Black FBR Flemish Bronze FG Flemish Gold GC Gold Colored SG Silver Grey W White	ON Surface Canopy	MK Mud kit into drywall over 4" junction box PRB Black coverplate for 4" junction box PRW White coverplate for 4" junction box	INC Integral Power Supply	D1-UNV 0-10V dim 120-277V

*** Contact factory for Dali, DMX, or other dimming options.

Related Products

Spy 27, Spy 39, Spy 52, Spy 66, Spy Focus, Spy C (pendant), Superloop-Spy MDL (mounts to suspended ring, rectangle, or square low voltage system), M-Spy (mounts to recessed, surface, or suspended low voltage system)



Finish Options


SPY 90 ON



INNER FINISH




Accessories

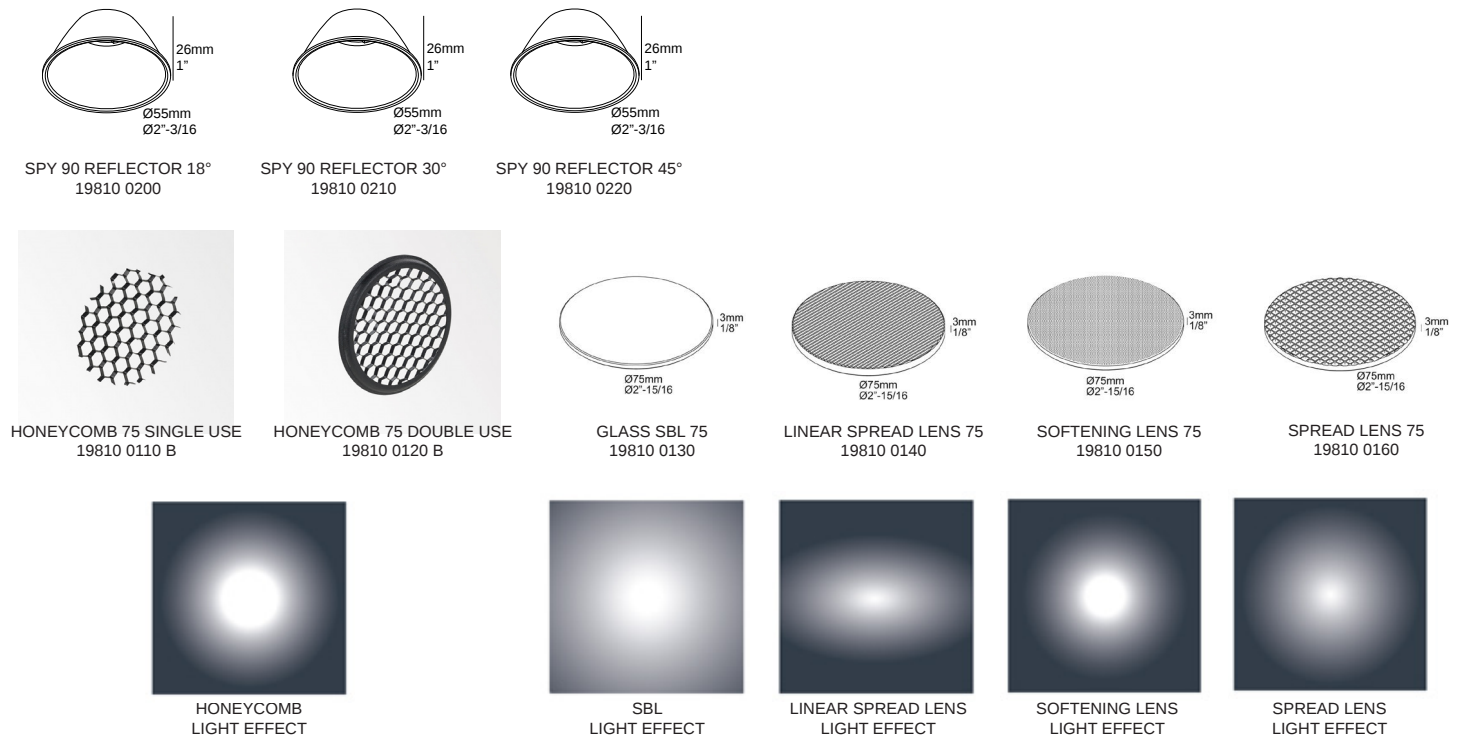




Photometric Data

SPY 90

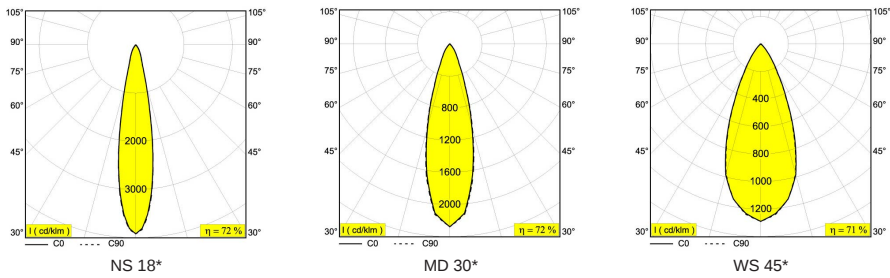

Installation Options

MK - MUD KIT 1 PB - COVERPLATE R 118

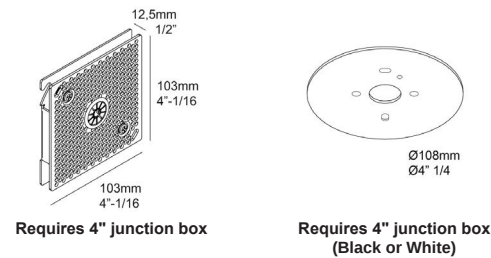

Driver Options

D1		Dimmer Compatibility
• Dimming Control	0-10V	
• Dimming Range	10-100%	
• Dim to off	NO	
• Power Factor @ Full Load	>0.9	
• Efficiency @ Full Load	≥90	
		• Leviton IP710-DLZ
		• Lutron DDTV-XX

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.