



COMPO S SOFT 93020

9 15712 9020 B


AVAILABLE IN

BLACK 9 15712 9020 B

CHROMED 9 15712 9020 C

DARK CHROMED 9 15712 9020 DC

WHITE 9 15712 9020 W

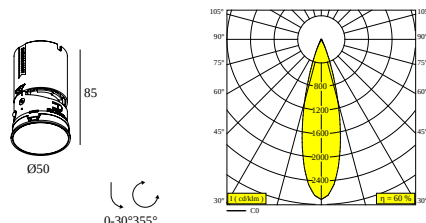

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 90
RECESSED DEPTH (MM)	85
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.12
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 50) / 3000K-1800K / 623lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	623lm // 6W // 105lm/W
LED TECHNICS (LUMINAIRE)	374lm // 6,9W // 54lm/W

Requirements

LED POWER SUPPLY 350 mA - DC

Accessories

COMPO S HONEYCOMB SINGLE USE B

COMPO S LINEAR SPREAD LENS

COMPO S SPREAD LENS

COMPO S SOFTENING LENS

COMPO S GLASS SBL

For detailed installation instructions, please consult the manual : [9_15712_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required
	 15710 0010 - MOUNTING KIT COMPO S TRIM	Required
	 15710 0040 - MOUNTING KIT COMPO S TRIMLESS	Required

FINISH YOUR SPECIFICATION

LED Power supply

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current

15710 3800

LED POWER SUPPLY MULTIPOWER 10W DIM8 350mA

1

15710 4500

LED POWER SUPPLY MULTIPOWER 12W DIM1 350mA

1

15710 5100

LED POWER SUPPLY MULTIPOWER 8W DALI DT6 350mA

1

Dimtype: DALI

Mounting kits



15710 0010 B MOUNTING KIT COMPO S TRIM B

Cutout dimension (mm): 55

15710 0010 W MOUNTING KIT COMPO S TRIM W



15710 0040 MOUNTING KIT COMPO S TRIMLESS

Cutout dimension (mm): 55

DELTALIGHT

COMPO S SOFT 93020

9 15712 9020 B

Light altering devices

15710 0100 B	COMPO S HONEYCOMB SINGLE USE B	☐
15710 0110	COMPO S LINEAR SPREAD LENS	☐
Cutout dimension (mm): 26,5		
15710 0120	COMPO S SPREAD LENS	☐
Cutout dimension (mm): 26,5		
15710 0130	COMPO S SOFTENING LENS	☐
Cutout dimension (mm): 26,5		
15710 0140	COMPO S GLASS SBL	☐
Cutout dimension (mm): 26,5		

Notes: