


ONE AND ONLY

A peculiar profile, both functional as decorative. The design of the body allows you to have up to 5 lines of light out of 1 profile, 3 for direct and 2 for indirect lighting. The soft glow of the light along the sides of the profile makes the One-And-Only float through the air, a powerful blend of light for an eye-catching look.

www.deltalight.com/oneandonly



ONE AND ONLY

1 PROFILE

PROFILE / m	404 00 00 ◇
MAX. LENGTH PER PROFILE SECTION 6m	◇ B ● / GC ● / W ○
POLYCARBONATE / m	
SANDBLASTED (SBL) 3x UP and 2x DOWN	INCLUDED

2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

3 JUNCTION / CORNER

-

4 ENDCAP

ENDCAP (2 PCS.)	404 03 01 B / W
-----------------	-----------------

5 FIXATION

SUSPENDED	
SUSPENSION SINGLE 1,6M (1 PC.)	404 09 01
SUSPENSION ROD 0,4M (1 PC.) EXCL. CABLING	328 27 40 B / W
SUSPENSION ROD 0,8M (1 PC.) EXCL. CABLING	328 27 80 B / W
SUSPENSION ST	-

6 CONNECTION



LED POWER SUPPLY KIT		-
NON DIM 24V-DC / 100W		404 24 100
1-10V DIM 24V-DC / 60W		404 24 60 ED1
SUSPENDED		
CURRENT SUPPLY 1,6M	3X0,75MM ²	377 98 51
	5X0,75MM ²	377 99 51
CURRENT SUPPLY 6,0M	3X0,75MM ²	377 98 56
	5X0,75MM ²	377 99 56
CONNECTION ST		15225 0360 B / W
CABLE BASE R		203 99 55 B / W
CABLE BASE S		203 99 56 B / W
COVERSET R	100MM	204 00 100 B / W

LIGHT MODULES




7 LED FLEX

NEXT PAGE

A

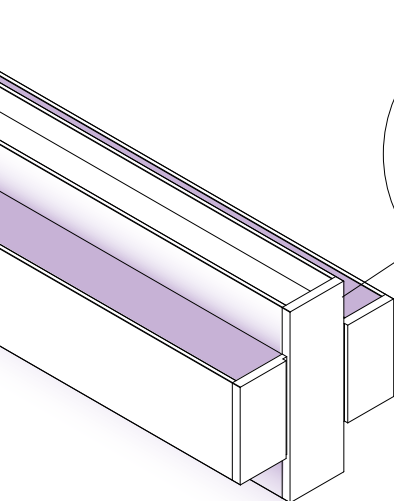

7
**POSITION
FOR LEDFLEX**

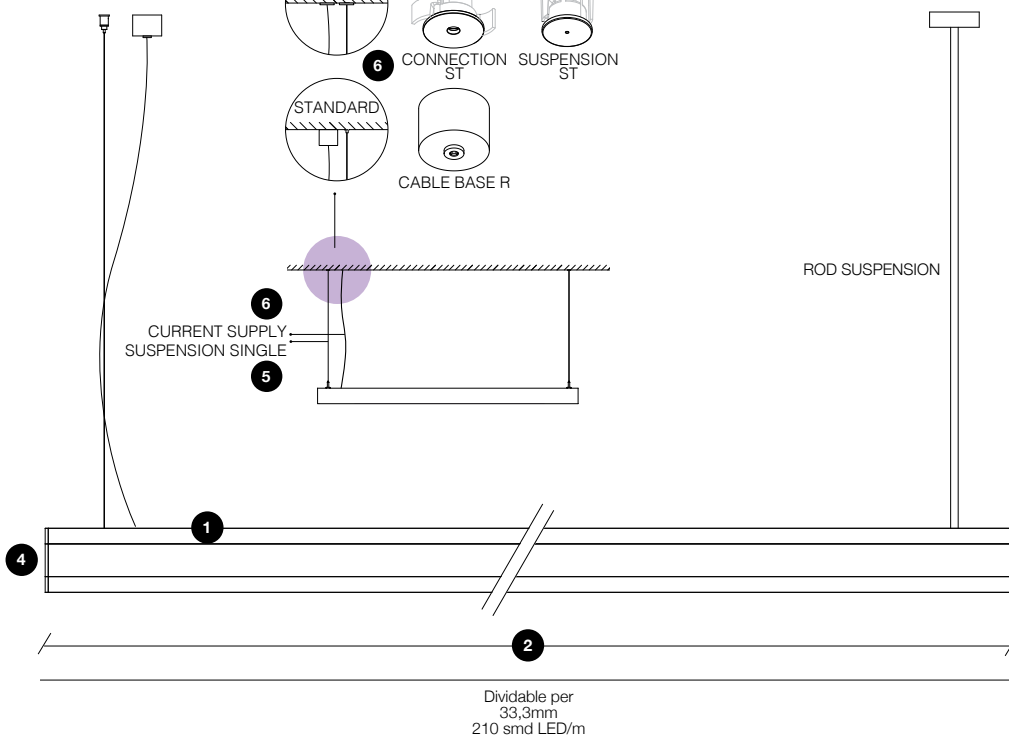

10 |
/ m - 24V-DC
MOUNTED

Dividable per
33,3mm
210 smd LED/m

10W/m
1045lm/m

LEDFLEX

IN MP

4000K CRI > 90	IN	21031 0140
3000K CRI > 90	IN	21031 0120
2700K CRI > 90	IN	21031 0110

LED POWER SUPPLY 24V-DC (MAX. 5M/POWERLINE) MORE INFO TECHNICAL CHAPTER

NON DIM	24W / IP20	21012 0160	max. 2,4m
	150W / IP67	300 89 24 150	max. 15m
0-10V DIM (DIM1)	60W / IP20	21012 0171	max. 6m
	90W / IP20	21012 0181	max. 9m
	120W / IP20	21012 0191	max. 12m
	60W / IP67	21012 0101	max. 6m
	90W / IP67	21012 0111	max. 9m
	120W / IP67	21012 0121	max. 12m
DALI (DIM5)	60W / IP20	21012 0205	max. 6m
	100W / IP20	21012 0225	max. 10m
	60W / IP67	21012 0135	max. 6m
	90W / IP67	21012 0145	max. 9m
	120W / IP67	21012 0155	max. 12m